

WALL IRONERS

R-25/100
R-25/120
R-25/140

FEATURES

These machines are small in dimensions and mural, so they can be placed in a reduced space, with hardly installation as they do not have air exhaust or connections except the electric supply.




- Front feed and return.
- Panels in skinplate (top panel in stainless steel).
- Roll dimensions: 1 m, 1,20 m and 1,40 m wide and 250 mm diameter.
- Electronic microprocessor:
 - Digital screen,
 - Precise control of temperatures.
- Electric heating.
- **Standard model:** roll covered in polyester and cotton felt.
- **NOMEX model:** padded and covered in Nomex, to work at higher temperature, up to 190°C.
- Chest in anodized aluminium.
- Automatic lifting of the chest.

OPTIONS

- Special voltages

TECHNICAL DATA	UNIT.	RS-25/100	RS-25/120	RS-25/140
GENERAL DETAILS				
Theoretical production 20-25 % humidity	Kg/h	30	35	40
Ø Roll	mm	250	250	250
Working width	mm	1.000	1.200	1.400
Working speed	mt/min	4,2	4,2	4,2
Electronic Control	-	Yes	Yes	Yes
Bed lifting	-	Auto	Auto	Auto
POWER				
Heating Power	Kw	4,95	6	7
Roller Motor Power	Kw	0,18	0,18	0,18
Total electric Power	Kw	5,13	6,18	7,18
Tension	V	400V III 50Hz (option 230V I)	400V III 50Hz (option 230V I)	400V III 50Hz (option 230V I)
DIMENSIONS				
Width	mm	1.400	1.600	1.800
Depth	mm	445	445	445
Height	mm	1.005	1.005	1.005
Weight	Kg	86	99	107
Volume	m3	0,63	0,72	0,81
PACKING DIMENSIONS				
Width	mm	1.490	1.690	1.900
Depth	mm	540	540	540
Height	mm	1.140	1.140	1.140
Weight	Kg	115	122	134
Volume	m3	0,92	1,04	1,17
OTHERS				
Sound Level	dB	55	55	55

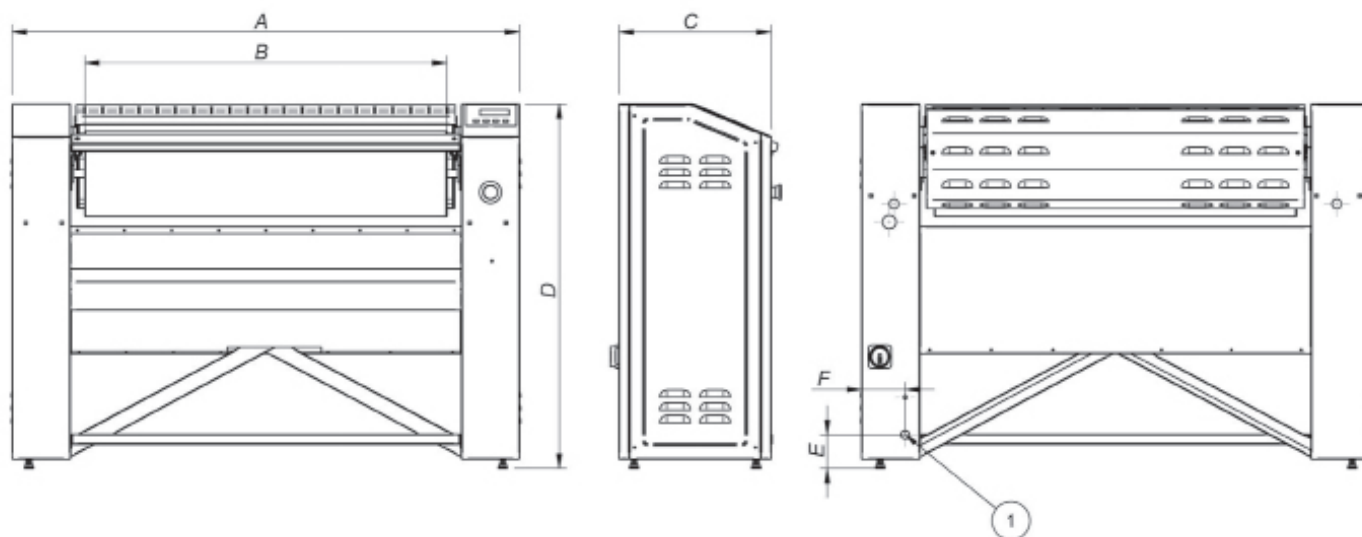

01. Electrical connection.

	A	B	C	D	E	F
R-25/100	1.400	1.000	420	1.005	93	120
R-25/120	1.600	1.200	420	1.005	93	120
R-25/140	1.800	1.400	420	1.005	93	120