

HIGH SPIN WASHERS EXTRACTORS

WED 27 ET2
WED 36 ET2



EASY TOUCH 2

- User friendly and fully programmable 7" screen,
- USB connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions...),
- 37 available languages,
- 8 dosing signals as standard.



EFFICIENCY

- Intelligent weighing system,
- Low water consumption,
- Optimal loading: water and chemicals adapted to the load,
- Water recovery tanks ready with AQUABAC.



G FORCE

- **High G factor 450:**
Reduced residual moisture and drying time.



VERSATILITY

- MAKE TO ORDER: possibility to customize,
- OPL <> COIN: standard model easily transformable.
- ELECTRIC <> HOT WATER
- WET CLEANING features as standard.



ERGONOMICS

- Big aluminium loading door (ø 460 mm for 27 kg, ø 560 mm for 36 kg),
- Easy opening / closing system for door lock.



CONNECTIVITY

- Remote communication ready as standard,
- Remote payment,
- Management of OPL and COIN-OP laundries.



EASY MAINTENANCE

- Hinged panel: easy access to parts,
- Same parts for all models: contactors, electronic devices, gear...
- Technical menu: statistics, alarms, traceability...



OTHERS

- Grey skinplate outer casing,
- Drum and vat in AISI 304 stainless steel,
- Free standing: no need to be anchored to the floor,
- 3 water inlets,
- Detergent dispenser with 4 compartments,
- LOADING AID feature: water and rotation control,
- Imbalance electronic control with frequency inverter.




OPTIONS

- Double drain kit for water recovery.
- Levelling feet.
- Aqua Flow kit for water recirculation.
- Plinth for loading height 850 mm from door bottom.
- Plinth for having same height in washers (self-service, 27 kg model).
- Relay card with 6 extra dosing signals: total of 14 signals.
- Automatic Weighing System : weighing sensor system on feet (includes 6 extra dosing signals kit).
- Steam kit to transform an electric or hot water heated machine into steam version.
- Body or front panel in AISI 304 stainless steel.
- Door silicone gasket.
- Printer
- Danube Online communication kit.
- "NC" normally closed drain valve.
- Self-service kits: coin or token meter + coin/token box, central pay
- Automatic door unlock device in case of power outage.
- Reversing door opening.
- Tropicalized model
- Ship voltage for electric models: 440V III 50/60 Hz no neutral.

TECHNICAL DATA	UNIT.	WED27 ET2	WED36 ET2				
DRUM							
Load capacity 1:9 / 1:10	Kg	28/25	39/35				
Volume	l	250	350				
Diameter	mm	770	860				
Depth	mm	530	602				
GENERAL DETAILS							
Washing speed / Spining speed	r.p.m.	45/1.024	42,5/966				
G Factor	-	450	450				
Maximum force transmitted	KN	4,92 ±1,75	7,36 ±2,45				
Frequency-dynamic force	Hz	15	14,3				
Sound level	dB	<70	<70				
Self-service version	-	Yes	Yes				
Double drain	-	Opt	Opt				
Weighing System / Tilting System	-	Opt/No	Opt/No				
DOOR							
Height center door / Height door	mm	865/560	885/540				
Diameter	mm	460	560				
POWER							
Motor	kW	4	4				
Heating (Electric model)	kW	18	21				
Max. power (Electric model)	kW	19,2	22				
Max. power (steam and hot water)	kW	4	4				
CONNECTIONS		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER		
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 16A	-	-		
Tension 230V - III + T	Nº x mm2 / A	3 x 10 / 50A	-	3 x 25 / 63A	3 x 1,5 / 16A		
Tension 400V - III + N + T	Nº x mm2 / A	3 x 4 / 32A	-	3 x 16 / 40A	3 x 1,5 / 6A		
Steam inlet (Steam mod.)	inch	3/4"		3/4"			
Maximum steam consumption (Steam mod.)	Kg/h	15		18			
Water inlet	inch	3/4"		3/4"			
Water main pressure	Kgs/cm ²	2-4		2-4			
Maximum water consumption*	Lit/h	175,5*		261,3*			
Drain	mm/inch	3"		3"			
Drainage capacity	Lit/min	200		200			
DIMENSIONS / PACKING DIMENSIONS							
Width / Width	mm	979/1.040			1.095/1.165		
Depth / Depth	mm	1.041/1.160			1.184/1.230		
Height / Height	mm	1.553/1.850			1.598/1.920		
Net weight / Gross weight	kg	490/545			750/820		

* N°20 Program, 75% load

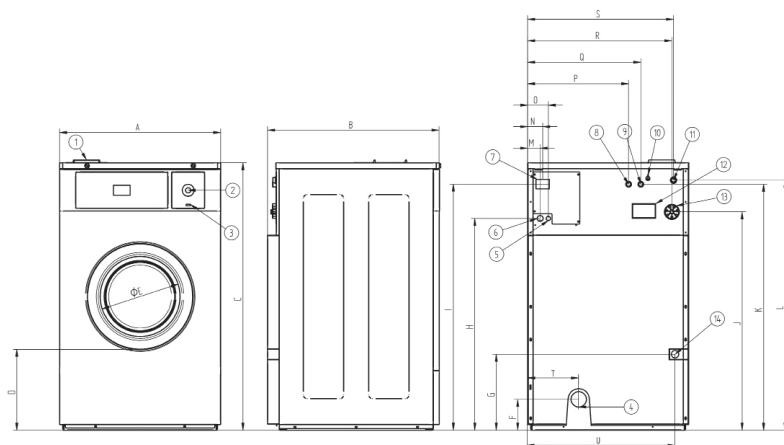

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
WED27	979	1.041	1.553	560	460	130	532	1.279	1.343	1.282	1.462	1.462	61	74	101	506	586	864	906	367	909
WED36	1.095	1.184	1.598	540	560	155	990	1.326	1.494	1.344	1.509	1.509	61	74	101	621	701	979	1.021	384	1.024