

## MEDIUM SPIN WASHERS EXTRACTORS

WEM 11 ET2  
WEM 14 ET2  
WEM 18 ET2



### EASY TOUCH 2

- User friendly and fully programmable 7" screen,
- USB connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions...),
- 37 available languages,
- 8 dosing signals as standard.



### EFFICIENCY

- Intelligent weighing system,
- Low water consumption,
- Optimal loading: water and chemicals adapted to the load,
- Water recovery tanks ready with AQUABAC.



### G FORCE

- **High G factor 300 for medium spin washers:**  
Reduced residual moisture and drying time.



### VERSATILITY

- MAKE TO ORDER: possibility to customize,
- OPL <> COIN: standard model easily transformable.
- ELECTRIC <> HOT WATER
- DRAIN VALVE <> PUMP
- WET CLEANING features as standard.



### ERGONOMICS

- Big aluminium loading door (ø 373 mm 11 & 14 kg models, ø 460 mm 18 kg model),
- Easy opening / closing system for door lock.



### CONNECTIVITY

- Remote communication ready as standard,
- Remote payment,
- Management of OPL and COIN-OP laundries.



### EASY MAINTENANCE

- Hinged panel: easy access to parts,
- Same parts for all models: contactors, electronic devices, gear...
- Technical menu: statistics, alarms, traceability...



### OTHERS

- Grey skinplate outer casing,
- Drum and vat in AISI 304 stainless steel,
- Rigid mounted: anchoring base to be ordered separately,
- 3 water inlets,
- Detergent dispenser with 4 compartments,
- LOADING AID feature: water and rotation control,
- Imbalance electronic control with frequency inverter.




## OPTIONS

- Double drain kit for water recovery.
- Aqua Flow kit for water recycle.
- Drain pump kit (11 and 14 kg models).
- Relay card with 6 extra dosing signals: total of 14 signals.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Body or front panel in AISI 304 stainless steel.
- Door silicone gasket (11 & 14 kg models).
- Anchoring base.
- Printer
- Danube Online communication kit.
- "NC" normally closed drain valve.
- Self-service kits: coin or token meter + coin/token box, central pay
- Automatic door unlock device in case of power outage.
- Reversing door opening.
- Tropicalized model
- Ship voltage for electric models: 440V III 50/60 Hz no neutral.

TECHNICAL DATA	UNIT.	WEM11 ET2	WEM14 ET2	WEM18 ET2			
<b>DRUM</b>							
Load capacity 1:9 / 1:10	Kg	11/10	14/13	20/18			
Volume	l	100	130	180			
Diameter	mm	620	620	700			
Depth	mm	330	430	470			
<b>GENERAL DETAILS</b>							
Washing speed / Spining speed	r.p.m.	50/ 929	50/ 929	47/ 874			
G Factor	-	300	300	300			
Maximum force transmitted	KN	2,08 ±5	2,36 ±6	2,77 ±8			
Frequency-dynamic force	Hz	12,66	12,66	12			
Sound level	dB	<70	<70	<70			
Self-service version	-	Yes	Yes	Yes			
Double drain	-	External	External	Opt			
<b>DOOR</b>							
Height center door / Height door	mm	570/310	570/310	655/348			
Diameter	mm	373	373	460			
<b>POWER</b>							
Motor	kW	1,1	1,1	2,2			
Heating (Electric model)	kW	6	9	12			
Max. power (Electric model)	kW	6,25	9,5	12,75			
Max. power (steam and hot water)	kW	1,1	1,1	2,2			
<b>CONNECTIONS</b>							
		<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>	<b>ELECTRICAL</b>	<b>STEAM / HOT WATER</b>
Tension 230V - I + N + T	Nº x mm2 / A	3 x 4 / 32A	3 x 1,5 / 6A	3 x 10 / 50A	3 x 1,5 / 10A	3 x 16 / 63A	3 x 1,5 / 10A
Tension 230V - III + T	Nº x mm2 / A	3 x 2,5 / 20A	-	3 x 4 / 25A	-	3 x 6 / 40A	-
Tension 400V - III + N + T	Nº x mm2 / A	3 x 1,5 / 10A	-	3 x 1,5 / 16A	-	3 x 2,5 / 20A	-
Steam inlet (Steam mod.)	inch	1/2"		1/2"		1/2"	
Maximum steam consumption (Steam mod.)	Kg/h	7		8,5		12	
Water inlet	inch	3/4"		3/4"		3/4"	
Water main pressure	Kgs/cm <sup>2</sup>	2-4		2-4		2-4	
Maximum water consumption*	Lit/h	59,8*		79,4*		118,7*	
Drain	mm/inch	3"		3"		3"	
Drainage capacity	Lit/min	200		200		200	
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Width / Width	mm	719/800		719/800		788/840	
Depth / Depth	mm	684/990		830/990		840/1.010	
Height / Height	mm	1.158/1.350		1.158/1.350		1.307/1.500	
Net weight / Gross weight	kg	212/225		239/247		281/301	

\* N°20 Program, 75% load

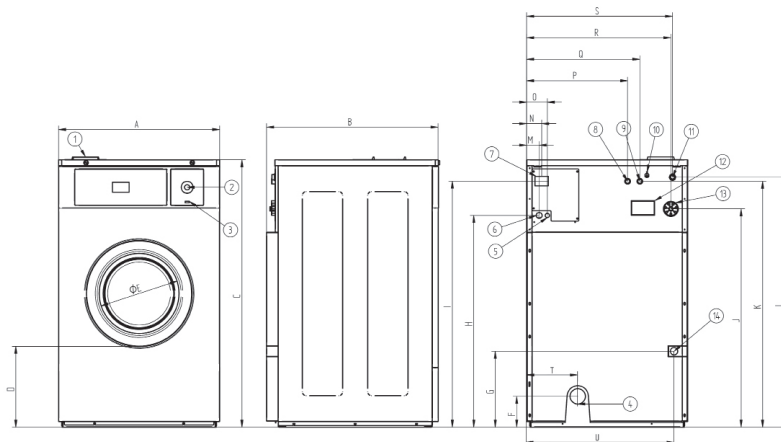

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
WEM11	719	684	1.158	310	373	135	440	886	1.055	940	1.053	1.073	61	74	101	440	495	637	650	211	654
WEM14	719	830	1.158	310	373	135	440	886	1.055	940	1.053	1.073	61	74	101	440	495	637	650	211	654
WEM18	788	840	1.307	348	460	150	371	1.035	1.203	1.067	1.202	1.222	61	74	101	494	554	706	714	248	718