

NORMAL SPIN WASHERS EXTRACTORS

WEN 27 ET2
WEN 36 ET2
WEN 60 ET2



EASY TOUCH 2

- User friendly and fully programmable 7" screen,
- USB connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions...),
- 37 available languages,
- 8 dosing signals as standard.



EFFICIENCY

- Intelligent weighing system,
- Low water consumption,
- Optimal loading: water and chemicals adapted to the load,
- Water recovery tanks ready with AQUABAC.



G FORCE

- High G factor 200 for normal spin washers
 - G factor 150 (60 kg model)
- Reduced residual moisture and drying time.



VERSATILITY

- MAKE TO ORDER: possibility to customize,
- OPL <> COIN: standard model easily transformable.
- ELECTRIC <> HOT WATER
- WET CLEANING features as standard.



ERGONOMICS

- Big aluminium loading door (ø 460 mm 27 kg model, ø 460 mm 36 & 60 kg models),
- Easy opening / closing system for door lock.



CONNECTIVITY

- Remote communication ready as standard,
- Remote payment,
- Management of OPL and COIN-OP laundries.



EASY MAINTENANCE

- Hinged panel: easy access to parts,
- Same parts for all models: contactors, electronic devices, gear...
- Technical menu: statistics, alarms, traceability...



OTHERS

- Grey skinplate outercasing,
- Drum and vat in AISI 304 stainless steel,
- Rigid mounted: anchoring base to be ordered separately,
- 3 water inlets,
- Detergent dispenser with 4 compartments,
- LOADING AID feature: water and rotation control,
- Imbalance electronic control with frequency inverter.



WEN 27 ET2




WEN 60 ET2

OPTIONS

- Double drain kit for water recovery.
- Aqua Flow kit for water recycle.
- Sluice: model with 8 mm drum holes.
- Relay card with 6 extra dosing signals: total of 14 signals.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Body or front panel in AISI 304 stainless steel.
- Anchoring base.
- Printer
- Danube Online communication kit.
- "NC" normally closed drain valve.
- Self-service kits: coin or token meter + coin/token box, central pay (27 & 36 kg models)
- Automatic door unlock device in case of power outage.
- Reversing door opening.
- Tropicalized model
- Ship voltage for electric models: 440V III 50/60 Hz no neutral.

TECHNICAL DATA	UNIT.	WEN27 ET2	WEN36 ET2	WEN60 ET2			
DRUM							
Load capacity 1:9 / 1:10	Kg	28/25	39/35	67/60			
Volume	l	250	350	600			
Diameter	mm	770	860	1.048			
Depth	mm	530	602	684			
GENERAL DETAILS							
Washing speed / Spining speed	r.p.m.	48/682	45/644	42,5/505			
G Factor	-	200	200	150			
Maximum force transmitted	KN	3,53 ±6	4,59 ±8	9,12 ±15			
Frequency-dynamic force	Hz	8,02	7,58	6,93			
Sound level	dB	<70	<70	<70			
Self-service version	-	Yes	Yes	No			
Double drain	-	Opt	Opt	Opt			
Option 8 mm holes drum	-	Yes	Yes	Yes			
DOOR							
Height center door / Height door	mm	700/400	735/440	900/540			
Diameter	mm	460	560	560			
POWER							
Motor	kW	3	4	5,5			
Heating (Electric model)	kW	18	21	28,8			
Max. power (Electric model)	kW	19	22	31,3			
Max. power (steam and hot water)	kW	3	4	5,5			
CONNECTIONS							
		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 16A	-	3 x 1,5 / 16A	-	-
Tension 230V - III + T	Nº x mm2 / A	3 x 10 / 50A	-	3 x 16 / 63A	-	3 x 25 / 100A	3 x 6 / 32A
Tension 400V - III + N + T	Nº x mm2 / A	3 x 4 / 32A	-	3 x 6 / 40A	-	3 x 16 / 63A	3 x 4 / 10A
Steam inlet (Steam mod.)	inch	3/4"		3/4"		3/4"	
Maximum steam consumption (Steam mod.)	Kg/h	15		18		21	
Water inlet	inch	3/4"		3/4"		3/4"	
Water main pressure	Kgs/cm ²	2-4		2-4		2-4	
Maximum water consumption*	Lit/h	164,8*		199,6*		627,9*	
Drain	mm/inch	3"		3"		3"	
Drainage capacity	Lit/min	200		200		200	
DIMENSIONS / PACKING DIMENSIONS							
Width / Width	mm	884/930		979/1.050		1.225/1.360	
Depth / Depth	mm	1.011/1.150		1.066/1.250		1.279/1.480	
Height / Height	mm	1.340/1.523		1.411/1.600		1.640/1.880	
Net weight / Gross weight	kg	340/370		473/503		930/1.050	

* Nº20 Program, 75% load

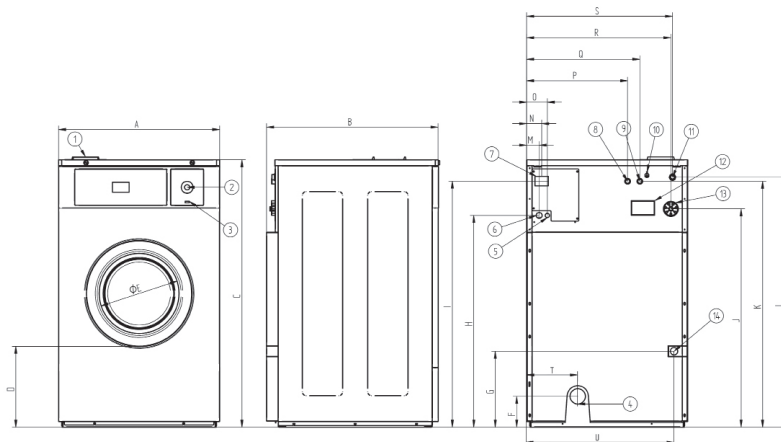

01. Soap dispenser
02. Emergency stop
03. Usb port
04. Drain
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Main switch
08. Auxiliar water inlet
09. Hot water inlet
10. Ground connection
11. Cold water inlet
12. Blur output / water overload
13. Liquid soap connection
14. Steam connection

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
WEN27	884	1.011	1.340	400	460	138	543	1.035	1.203	1.053	1.218	1.218	61	74	101	410	490	769	810	268	820
WEN36	979	1.066	1.411	440	560	143	625	1.139	1.307	1.142	1.322	1.322	61	74	101	506	586	864	906	262	917
WEN60	1.225	1.279	1.640	540	560																