

## TUMBLE DRYERS

### TWO IN ONE

STD 11  
STD 16

### FEATURES

- Construction in grey skinplate, stainless steel look.
- Big loading door (opening of 180°).
- Direct drive through a gearbox, no pulley.
- **ELECTRONIC CONTROL:** Easy and intuitive to use, the electronic control offers a complete control of the process.
- **REVERSING DRUM:** All models offer the reverse turning of the drum.
- **STAINLESS STEEL DRUM** standard.
- **DOUBLE FLOW:** Mixed axial-radial airflow to optimise and maximise the airflow circuit in the drum.
- **GENTLE DRY:** The new drum with stamped holes makes sure the linen is gently handled.
- **FULL SCREEN FILTER:** New filter drawer with wide surface and improved airflow. Filter grid is standard 0,6mm in stack dryers.
- **Cool Down:** Anti-wrinkle at the end of cycle.
- Models available in electric or gas.
- **Self-service** there are two versions:
  - **DTP2 CP/2COIN** - to connect to a central pay or with 2 coiners as it can be ordered with 2 coin kits + boxes, and
  - **DTP2 1COIN** - to work with 1 coin.
- There is also a new token kit to be ordered with the token box.




### OPTIONS

- **CARE DRY:** Intelligent Moisture Control.
- **SPRINKLER:** Integrated Fire Extinguishing System.
- Back panel with air filter.
- Double doorglass.
- Stainless steel body.
- Stainless steel front panel.
- Model versions in 60 Hz.
- Marine versions 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



TECHNICAL DATA	UNIT.	STD11	STD16		
<b>CAPACITY</b>					
Capacity 1/18	Kg	23	37		
Capacity 1/20	Kg	22	34		
Hourly Output	Kg/h	34	53		
Evaporation capacity	l/h	17,5	27,4		
<b>DRUM</b>					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547/1.522	547/1.522		
Load hole bottom height	mm	260/1.235	260/1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
<b>POWER</b>					
Drum motor power	Kw	0,37*2	0,37*2		
Fan Motor Power	Kw	0,25*2	0,25*2		
Total Installed power	Kw	25,1	25,1		
Electric Heating (Installed power)	Kw	12x2	12x2		
Gas heating (installed Power) in KW	Kw	12x2	12x2		
Gas heating (installed el. power)	Kw	1,1	1,1		
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	4 x 1,5 / 20A	4 x 25 / 80A	4 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	5 x 1,5 / 20A	5 x 10 / 40A	5 x 1,5 / 20A
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Width / Width	mm	785/865	785/865	785/865	785/865
Depth / Depth	mm	955/1.055	955/1.055	1.225/1.325	1.225/1.325
Height / Height	mm	1.980/2.126	1.980/2.126	1.980/2.126	1.980/2.126
Net weight / Gross weight	Kg	260/268	260/268	290/303	290/303
<b>OTHERS</b>					
Max airflow	m3/h	500*2	500*2	500*2	500*2
Ø Fume exhaust	mm	200	200	200	200
Sound level	dB	64	64	64	64

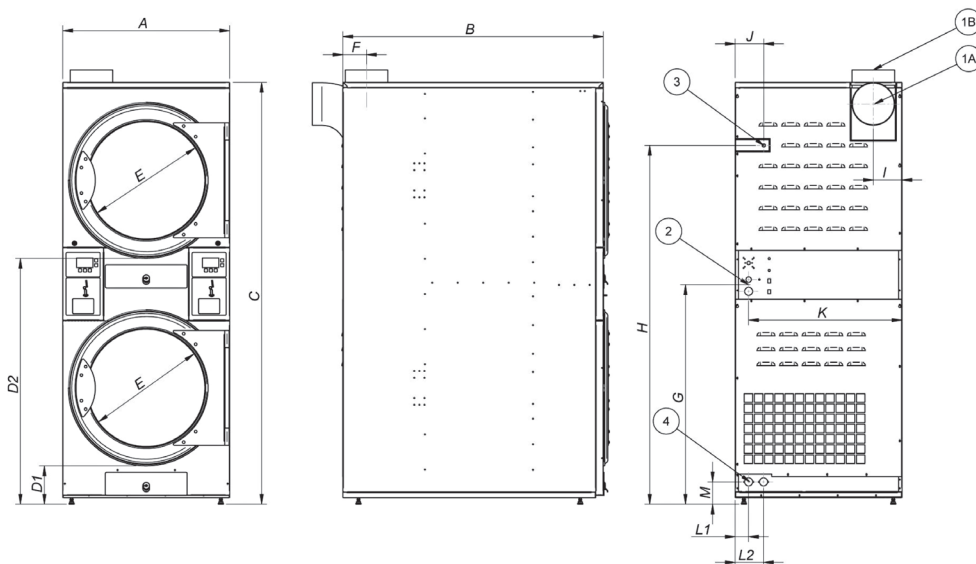

- 1A. Fumes outlet (rear option)
- 1B. Fumes outlet (upper option)
- 02. Electrical connection
- 03. Gas connection
- 04. Anti fire water valves

	A	B	C	D1	D2	E	F	G	H	I	J	K	L1	L2	M
STD11	785	955	1.980	189	1.164	574	111	1.031	1.686	135	135	721	63	133	105
STD16	785	1.225	1.980	189	1.164	574	111	1.031	1.686	135	135	721	63	133	105