


IRONING TABLES WITH SUCTION UNIT WITHOUT BOILER

TF-A
TF-AS
TF-AVS

FEATURES

- Vacuum ironing table + iron, with electrically heated board and suction.
- Adjustable temperature of the board by means of a thermostat.
- Built-in single phase suction unit.
- Working table dimensions (1.200 x 400 x 250 mm).
- Works by means of pedal.
- To be connected to external steam supply.

A - Vacuum
V - Up steaming
S - Blowing

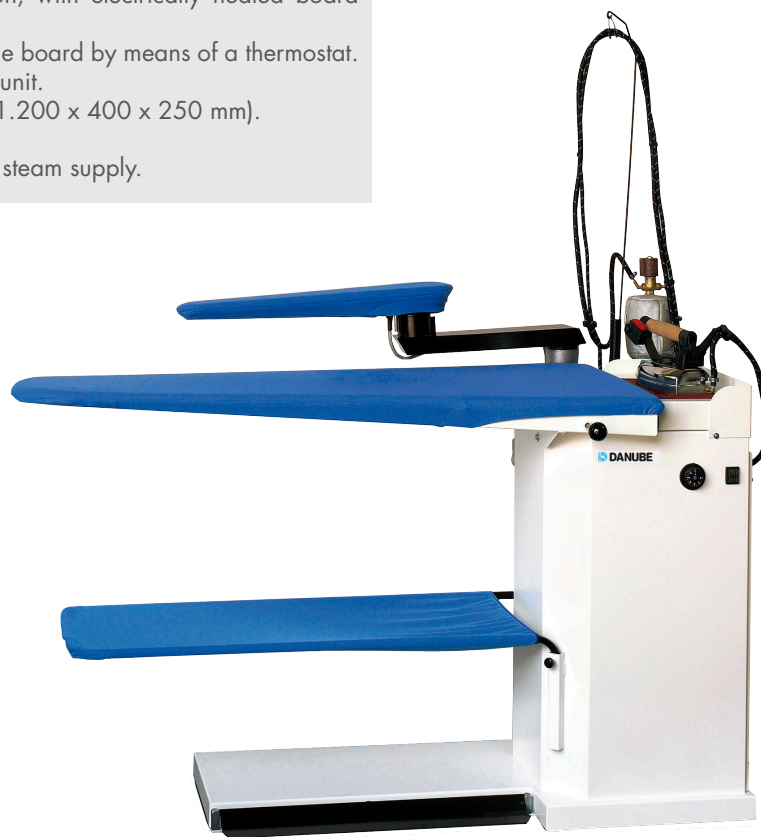

TF-A

OPTIONS

- Swinging arm with suction and heated sleeve shape.
- Steam gun for: TF-A / TF-AS / TF-AVS.
- Sliding trolley with light for: TF-A / TF-AS / TF-AVS.

TECHNICAL DATA	UNIT.	TF-A	TF-AS	TF-AVS
CAPACITY				
Boiler	-	No	No	No
Boiler capacity	l	-	-	-
Board dimensions	mm	1.200 x 400 x 250	1.200 x 400 x 270	1.200 x 400 x 250
OPTIONS				
Swinging arm with suction and heated sleeve shape	-	Opt	Opt	Opt
Steam gun	-	Opt	Opt	Opt
Sliding trolley with balancer and lighting	-	Opt	Opt	Opt
Second steam iron assembly	-	No	No	No
POWER				
Vacuum Motor	kW	0,45	0,45	0,45
Pump Motor	kW	-	-	-
Iron Heater	kW	0,83	0,83	0,83
Board heater	kW	1	1	-
Sleeve-arm heater (option)	kW	0,09	0,09	0,09
CONNECTIONS				
Ø Water inlet	BSP	-	-	-
Ø Steam inlet	BSP	1/4"	1/4"	3/8"
Steam pressure	BAR	-	-	4-5
Steam Consumption	Kg/h	5	5	10-15
Ø Air inlet	BSP	-	-	1/4"
Air pressure	BAR	-	-	4-8
Air Consumption	NI/m	-	-	5
DIMENSIONES / DIMENSIONES CON EMBALAJE				
Width / Width	mm	1.480/1.520	1.500/1.520	1.680/1.880
Depth / Depth	mm	480/580	600/580	580/680
Height / Height	mm	930/1.120	1.800/1.120	920/1.270
Net weight / Gross weight	kg	66/82	81/97	141/165
Volume	m ³	3,20/5,19	3,88/6,23	4,68/7,43
OTHERS				
Voltage	Hz	230V 50	230V 50	230V 50
Sound level	dB	68	70	75