

PROFESSIONAL HIGH SPIN WASHERS EXTRACTORS

WPR 8 ET2
WPR 10 ET2



ROBUSTNESS

- Robust door in aluminium,
- Vat, drum and ribs in AISI 304 stainless steel,
- Industrial house bearing and bearings,
- Gear and inverter same as industrial washer,
- Industrial door lock system,
- No inner drum seal,
- Easy to maintain, clean, more industrial.



FEATURES

- User friendly, fully programmable 4,3" EASY TOUCH 2,
- 8 dosing signals as standard,
- USB connection. PC Software free of charge for programming, traceability, data analyses...
- Remote communication ready,
- Multi-payable system,
- Videos shown on display (ads, instructions...),
- Short washing cycles (heating power 6 kw).



VERSATILITY

- OPL <> COIN: standard model easily transformable.
- ELECTRIC <> HOT WATER
- DRAIN VALVE <> PUMP
- SINGLE <> STACKED
- WET CLEANING features as standard.



EFFICIENCY

- Intelligent weighing system,
- Optimal loading: water and chemicals adapted to the load,
- Plinth for better ergonomics,
- Plinth for mops,
- Plinth with tank for water recovery,
- High G force 450 : reduced residual moisture, reduced drying time.
- Water recovery tanks ready with AQUABAC.



OTHERS

- Grey skinplate outercasing,
- Free standing: no need to be anchored to the floor,
- 2 water inlets,
- Detergent dispenser with 4 compartments,
- LOADING AID feature: water and rotation control,
- Imbalance electronic control with frequency inverter,
- Levelling feet included.
- Model with drain valve and model with pump.




WPR + plinth

OPTIONS

- Relay card 6 extra dosing signals (total 14 signals).
- Plinth for loading height (850 mm door bottom).
- Plinth for mops (filter included). Only model with valve.
- Plinth for water recovery.
- Double drain kit (valve mod. only).
- Reversing door opening.
- Automatic door unlock device in case of power outage.
- AISI-304 stainless steel panels.
- Danube Online communication kit.
- Printer.
- Door silicone gasket.
- "NC" normally closed drain valve.
- Valve-Pump transformation kit.
- Self-service kits: coin or token meter + coin/token box, central pay.
- Ship voltage: 440V III 50/60 Hz no neutral

| TECHNICAL DATA | UNIT. | WPR8 V | WPR8 P | WPR10 V | WPR10 P |
|--|---------|-------------|-------------|-------------|-------------|
| DRUM | | | | | |
| Load capacity 1:9 / 1:10 | Kg | 9/8 | 9/8 | 11/10 | 11/10 |
| Volume | l | 80 | 80 | 100 | 100 |
| Diameter | mm | 532 | 532 | 532 | 532 |
| Depth | mm | 360 | 360 | 425 | 425 |
| GENERAL DETAILS | | | | | |
| Washing speed / Spining speed | r.p.m. | 50/ 1.250 | 50/ 1.250 | 50/ 1.250 | 50/ 1.250 |
| G Factor | - | 450 | 450 | 450 | 450 |
| Self-service version | - | Yes | Yes | Yes | Yes |
| Double drain | - | Opt | No | Opt | No |
| Weighing system / tilting system | - | No | No | No | No |
| DOOR | | | | | |
| Height center door / base door | mm | 537/280 | 537/280 | 537/280 | 537/280 |
| Loading diameter | mm | 373 | 373 | 373 | 373 |
| DYNAMIC FORCE | | | | | |
| Static Load | KN | 0,14 | 0,14 | 0,15 | 0,15 |
| Maximum Dynamic load | KN | 0,5 | 0,5 | 0,6 | 0,6 |
| Vertical maximum load | KN | 0,64 | 0,64 | 0,75 | 0,75 |
| Max revolutions | r.p.m. | 1.250 | 1.250 | 1.250 | 1.250 |
| Frequency of dynamic load | - | 18,33 | 18,33 | 18,33 | 18,33 |
| POWER | | | | | |
| Motor | kW | 0,75 | 0,75 | 0,75 | 0,75 |
| Electric heating | kW | 6 | 6 | 6 | 6 |
| Hot water heating | kW | 0 | 0 | 0 | 0 |
| Max. power electric model | kW | 6,25 | 6,25 | 6,25 | 6,25 |
| Max. power HW model | kW | 0,75 | 0,75 | 0,75 | 0,75 |
| Max. power steam | kW | N/A | N/A | N/A | N/A |
| CONNECTIONS | | | | | |
| Water inlet | inch | 3/4" | 3/4" | 3/4" | 3/4" |
| Drain | mm/inch | 2" | 1" (Pump) | 2" | 1" (Pump) |
| DIMENSIONS / PACKING DIMENSIONS | | | | | |
| Width / width | mm | 680/710 | 680/710 | 680/710 | 680/710 |
| Depth / depth | mm | 698/832 | 698/832 | 742/832 | 742/832 |
| Height / height | mm | 1.040/1.130 | 1.040/1.130 | 1.040/1.130 | 1.040/1.130 |
| Net weight / Gross weight | kg | 140/150 | 140/150 | 150/160 | 150/160 |

V= Drain valve / P = Pump

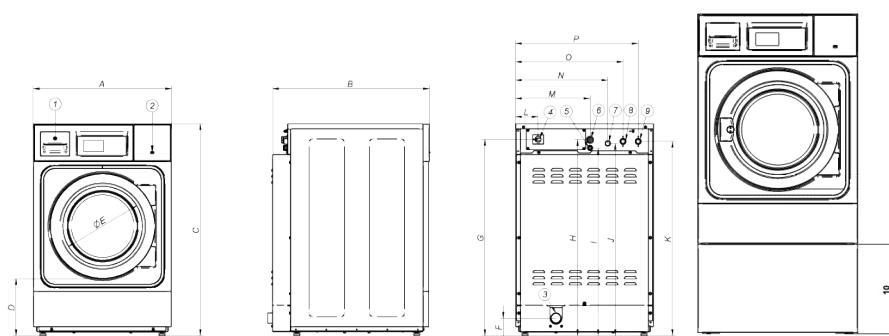

01. Soap dispenser
02. Usb port
03. Drain
04. Main switch
05. Electric connection to liquid soap pumps
06. Electrical connection
07. Liquid soap inlet
08. Cold water inlet
09. Hot water inlet
10. Plinth height 389mm

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q |
|----------|-----|-----|------|-----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| WPR-8 V | 680 | 698 | 1040 | 278 | 373 | 86 | 964 | 962 | 922 | 944 | 954 | 110 | 366 | 453 | 528 | 603 | 199 |
| WPR-8 P | 680 | 698 | 1040 | 278 | 373 | - | 964 | 962 | 922 | 944 | 954 | 110 | 366 | 453 | 528 | 603 | - |
| WPR10 V | 680 | 742 | 1040 | 278 | 373 | 86 | 964 | 962 | 922 | 944 | 954 | 110 | 366 | 453 | 528 | 603 | 199 |
| WPR-10 P | 680 | 742 | 1040 | 278 | 373 | - | 964 | 962 | 922 | 944 | 954 | 110 | 366 | 453 | 528 | 603 | - |

<https://www.danube-romania.ro>
office@danube-romania.ro

