



### EASY TOUCH 2

4,3" touch screen user friendly and programmable ET2  
USB Connection. PC software free of charge for  
programming, traceability, data analysis...  
Videos on display (ads, instructions, etc.)  
37 languages



### OUTSTANDING FEATURES

Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard



### EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow  
Big fluff filter



### VERSATILITY

Make to order - customisation

### WET CLEANING

OPL > Multivending - Standard OPL model easily  
trasformable to coin laundry uses



### CONNECTIVITY

Remote technical service  
Managemnt of laundries: OPL and COIN  
Remote payment



### ERGONOMICS

Drawer as fluff filter, made of stainless steel  
Biggest door diameters  
Opening sense of door adjustable on site



### MAINTENANCE

Hinged panel: easy and ergonomic access  
Technical menu: statistics, alarm, autotest, data  
recovery for technicians and maintenance



### OTHERS

Grey skinplate outer casing, stainless steel look  
Transmission by direct drive  
SOFT DRY - new drum with stamped holes  
COOL DOWN - anti-wrinkle at the end of the cycle  
No need of exhaust to the exterior  
Low energy consumption  
Water to refrigerate, which may be reused to wash  
CE approved




## OPTIONS

- CARE DRY - Intelligent humidity control
- Double door glass
- Reverse door opening
- Printer kit
- Danube Online communication kit
- Stainless steel AISI 304 outercasing
- Stainless steel AISI 304 frontal panel
- Wooden packing

DONNEES TECHNIQUES	UNIT.	HP-11 SILVER ET2	HP-16 SILVER ET2	HP-23 SILVER ET2
<b>CAPACITY</b>				
Capacity 1/20	Kg	11	17	23
Capacity 1/30	Kg	7	11	15
Hourly Output*	Kg/h	9,8	12,2	13,6
Evaporation capacity*	l/h	5,0	6,3	6,88
<b>DRUM</b>				
Ø Drum	mm	750	750	855
Drum length	mm	475	746	800
Drum volume	l	210	330	460
Ø Loading door	mm	574	574	574
<b>POWER</b>				
Drum motor power	kW	0,37	0,37	0,37
Fan motor power	kW	0,55	0,55	0,55
Electric heating power ALL RANGES	kW	3,8 + 4,0 ***	3,8 + 4,0 ***	3,8 + 4,0 ***
Total electric power HP SILVER	kW	4,77	4,77	4,77
Energetic consumption	** kWh/ l	0,82	0,71	0,61
Nominal airflow	m <sup>3</sup> /h	1.200	1.200	1.200
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>ELECTRICAL</b>	<b>ELECTRICAL</b>
Tension 400V - III + N + T (50 Hz)	N° x mm <sup>2</sup> / A	5 x 4 / 20	5 x 4 / 20	5 x 4 / 20
Heat pump inlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Heat pump outlet (Cooling)	BSP	1/2 "	1/2 "	1/2 "
Drain	BSP	3/4 "	3/4 "	3/4 "
<b>DIMENSIONS / PACKING DIMENSIONS</b>				
Net width / Gross width	mm	785 / 865	785 / 865	890/970
Net Depth / Gross Depth	mm	1.255/ 1.380	1.525 / 1.650	1.595/1.720
Net Height / Gross Height	mm	1.694 / 1.840	1.694 / 1.840	1.812 / 1.940
Net weight / Gross weight	Kg	342 / 356	357/ 372	380/395
<b>OTHERS</b>				
Sound level	dB	64	64	64

\*\* kWh per litre of evaporated water

\*\*\* Compressor + heat. elements

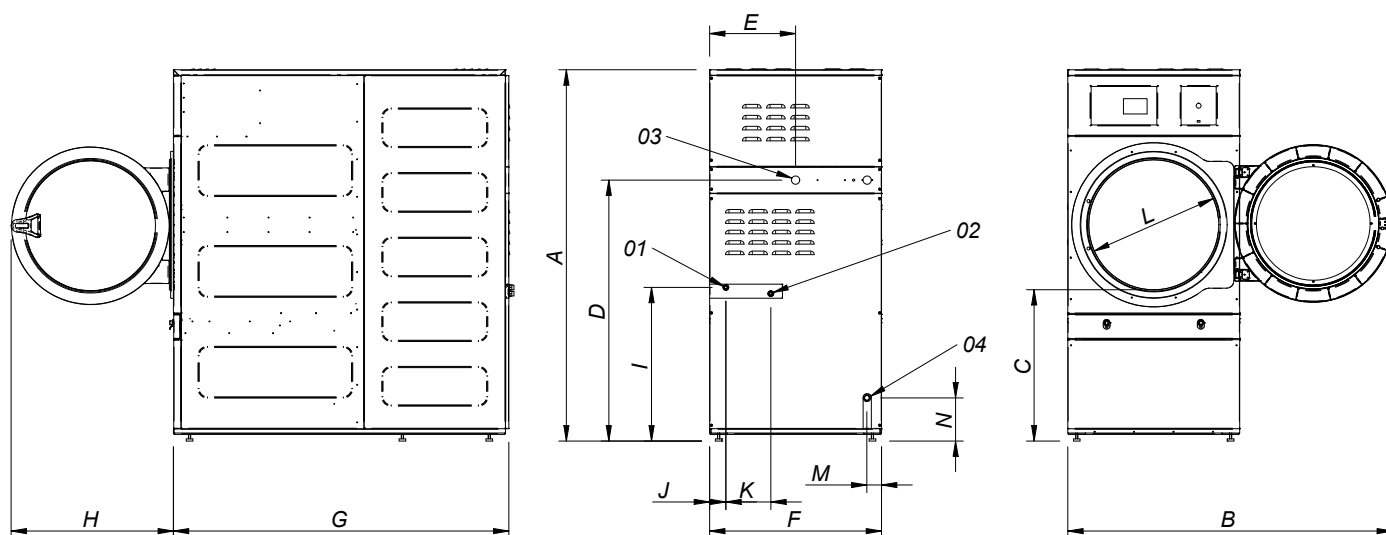

- 01 REFRIGERATION WATER INLET 1/2"
- 02 REFRIGERATION WATER OUTLET (HOT) 1/2"
- 03 ELECTRIC CONNECTION
- 04 DRAIN 3/4"

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
DD-11 HP	1694	1447	689	1190	392	785	1255	735	700	75	205	575	67	197
DD-16 HP	1694	1447	689	1190	392	785	1525	735	700	75	205	575	67	197
DD-23 HP	1812	1552	743	1190	445	890	1595	735	700	127	205	575	119	250