



EASY TOUCH 2

7" touch screen fully programmable
38 available languages
10 preset programs
USB connection. PC software free of charge for programming, traceability, data analysis
Reversing roll incorporated



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure
Automatic shutdown at 80°C
Fumes circulation circuit from the bottom reducing energy consumption
Radiant gas model: production improved by 25 %



VERSATILITY

Radiant gas model: flexible, suitable for high altitude installations
Optional built-in length folder with or without rear exit option



ROBUSTNESS

Roll driving by speed inverter
Stainless steel and grey skinplate panels
Nomex quality feeding and ironing belts: high temperatures resistant
Chrome plate roll as option: anticorrosive, more durable



ERGONOMICS

Acoustic comfort : <65 dB
Appropriate operating height: 1120 mm feeding belts
Compact dimensions




MAINTENANCE

Easy access to all components on both sides of the machine
Connections : electrical connection and air extraction
Complete technical menu: statistics, autotest, data recovery for technician and maintenance
Remote communication: faster intervention



OTHERS

Dries and irons flat linen in a single operation
Front feeding and return
Built-in cool down system
Polished steel roll ø 500 mm
Working width: 2000, 2600 and 3300 mm
Electric, gas or steam heating

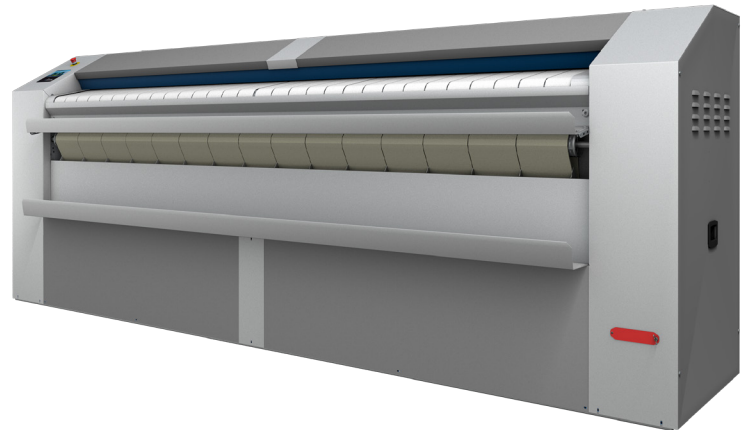


OPTIONS

- CARE IRON : automatic regulation of ironing speed according to residual moisture
- HPS, high production system, speed reduced on feeding and increased on ironing up to 15 m/mn
- Built-in lengthwise folder
- Rear exit (only with folder)
- Chrome plate cylinder
- Marine tension 440V III 60 Hz without N (electric models)
- Tension 230V III 50-60 Hz

TECHNICAL DATA	UNIT.	M-20 ET2	M-26 ET2	M-33 ET2			
GENERAL DETAILS							
Theoretical production *	Kg/h	50-70	60-80	80-120			
Theoretical production radiant gas *	Kg/h	60-84	72-96	96-144			
Evaporation power	Kg/h	35-49	42-56	56-84			
Ø Roll	mm	500	500	500			
Working width	mm	2000	2600	3300			
Height of feeding belts	mm	1.120	1.120	1.120			
Ironing speed	m/min	1 - 8	1 - 8	1 - 8			
Control		ET2	ET2	ET2			
No programs	N°	10	10	10			
Rear exit + length folder		OPT	OPT	OPT			
POWER							
Electric heating	kW	31,5	40,5	54			
Total electric power (Elec. model)	kW	32,12	41,37	54,87			
Gas heating	kW	40	55	69			
Total electric power (Gas model)	kW	0,87	0,87	0,87			
Steam heating	kW	50	64	81			
Total electric power (Steam model)	kW	0,62	0,87	0,87			
Roll motor	kW	0,37	0,37	0,37			
Fan motor	kW	0,25 (x2 in gas)	0,25 x 2	0,25 x 2			
Add. elec. power with folder	kW	0,56	0,56	0,56			
Add. elec. power with folder + rear exit	kW	0,74	0,74	0,74			
CONNECTIONS		ELECTRIC	GAS / STEAM	ELECTRIC	GAS / STEAM	ELECTRIC	GAS / STEAM
Tension 230V - III + T	N°x mm²/A	4x35 / 100A	4x2,5 / 6A	4x25 / 125A	4x2,5 / 6A	4x35 / 160A	4x2,5 / 6A
Tension 400V - III + N + T	N°x mm²/A	5x10 / 50A	5x2,5 / 6A	5x16 / 63A	5x2,5 / 6A	5x25 / 100A	5x2,5 / 6A
Ø gas inlet	BSP	1"		1"		1"	
Ø steam inlet	BSP	3/4"		3/4"		3/4"	
Ø condensed (steam model)	BSP	1/2"		1/2"		1/2"	
DIMENSIONS / PACKING DIMENSIONS							
Net width / Gross width	mm	2.829 / 3.075		3.429 / 3.685		4.129 / 4.385	
Net depth / Gross depth	mm	1.070 / 1.170		1.070 / 1.170		1.070 / 1.170	
Net height / Gross height	mm	1.413 / 1.675		1.413 / 1.675		1.413 / 1.675	
Net weight / Gross weight	kg	930 / 960		1.180 / 1.220		1.430 / 1.480	
Volume	m3	6,03		7,22		8,59	
OTHERS							
No fume outlet	No	1 (2 in gas)		2		2	
Ø Extraction	mm	153		153		153	
Air flow	m3/h	600 (1.200 in gas)		1.200		1.200	
Noise level	dB	65		65		65	

*45 %-25 % moisture

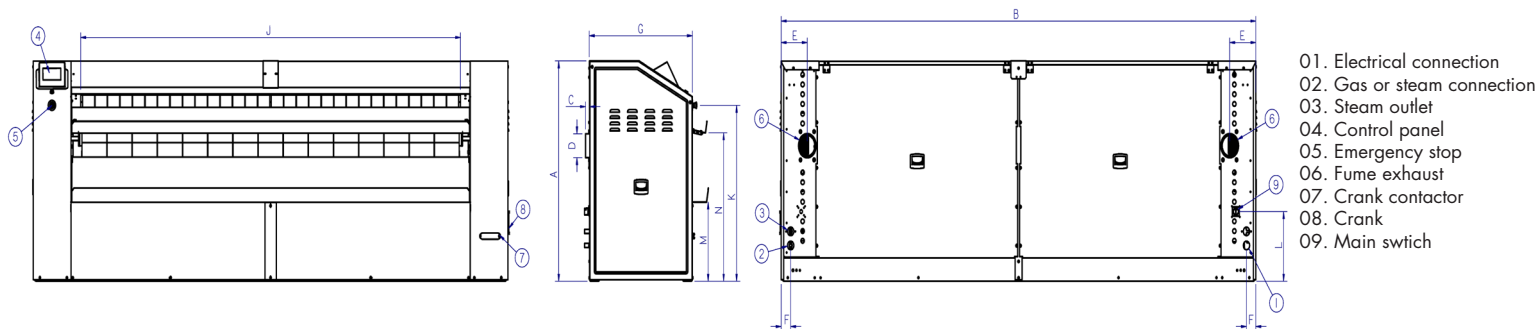

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
M-20	1.413	2.829	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
M-26	1.413	3.429	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
M-33	1.413	4.129	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952