



### EM PROGRAMMER

New EM programmer: push buttons to control temperature and time



### OUTSTANDING FEATURES

Galvanised drum as standard  
Reversing drum action as standard  
Frequency inverter as standard



### EFFICIENCY

Big fluff filter



### VERSATILITY

Make to order - customisation  
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



### ERGONOMICS

Drawer as fluff filter, made of stainless steel  
Biggest door diameters




### MAINTENANCE

Hinged panel: easy and ergonomic access  
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with external console



### OTHERS

Transmission by direct drive  
COOL DOWN - anti-wrinkle at the end of the cycle  
Electric or gas heating  
CE approved

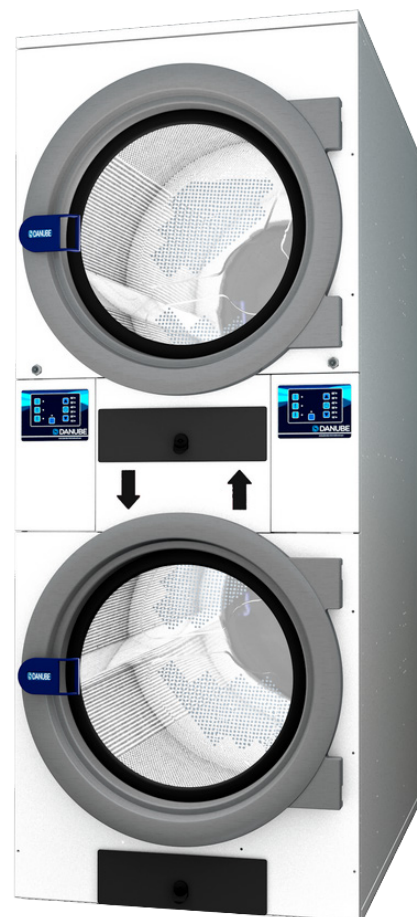


## OPTIONS

- EM Control programming console
- New display for EM programmer
- Rear panel external air + filter
- Wooden packing
- Exhaust silencer Ø 200 mm
- Ship voltage for electric models:  
440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	STD-11 BASIC EM		STD-16 BASIC EM	
<b>CAPACITY</b>					
Capacity 1/18	Kg	23		37	
Capacity 1/20	Kg	22		34	
Hourly Output*	Kg/h	34,5		36,3	
Evaporation capacity*	l/h	16,5		18,6	
<b>DRUM</b>					
Ø Drum	mm	750		750	
Ø Door	mm	574		574	
Door center height	mm	547/1.522		547/1.522	
Load hole bottom height	mm	260/1.235		260/1.235	
Drum length	mm	475		746	
Drum volume	l	210		330	
<b>POWER</b>					
Drum motor power	Kw	0,37x2		0,37x2	
Fan motor power STACK BASIC	Kw	0,25x2		0,25x2	
Electric heating power ALL RANGES	Kw	12x2		12x2	
Total electric power (elec.model) STACK BASIC	Kw	25,34		25,34	
Gas heating power ALL RANGES	Kw	12x2		12x2	
Total electric power (gas model) STACK BASIC	Kw	1,34		1,34	
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net width / Gross width	mm	785/865		785/865	
Net Depth / Gross Depth	mm	972/1.055		1.242 /1.325	
Net Height / Gross Height	mm	1.980/2.126		1.980/2.126	
Net weight / Gross weight	Kg	260/268		290/303	
<b>OTHERS</b>					
Max airflow	m3/h	1000		1000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

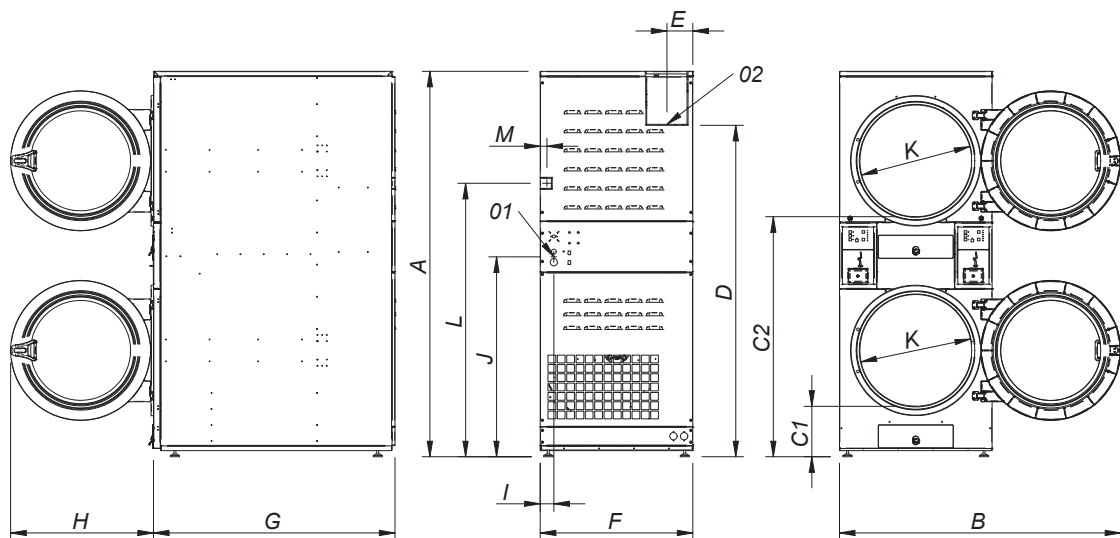

01 ELECTRIC CONNECTION  
02 FUMES OUTLET Ø200

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
STD-11	1980	1447	259	1234	1620	135	785	972	735	64	1031	575	1406	35
STD-16	1980	1447	259	1234	1620	135	785	1242	735	64	1031	575	1406	35