



EM PROGRAMMER

New EM programmer: push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with external console



OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved




OPTIONS

- EM Control programming console
- New display for EM programmer
- Double doorglass
- Rear panel external air + filter
- Wooden packing
- Exhaust silencer Ø 200 mm
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	STD-11 BRONZE EM	STD-16/STD-16 GTURBO		
CAPACITY					
Capacity 1/18	Kg	23	37		
Capacity 1/20	Kg	22	34		
Hourly Output*	Kg/h	34,5	36,3 (76 DTM2-18 G TURBO)		
Evaporation capacity*	l/h	16,5	18,6		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547/1.522	547/1.522		
Load hole bottom height	mm	260/1.235	260/1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	Kw	0,37x2	0,37x2		
Fan motor power STACK BRONZE	Kw	0,25x2	0,25x2		
Electric heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (elec.model) STACK BRONZE	Kw	25,34	25,34		
Gas heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (gas model) STACK BRONZE	Kw	1,34	1,34		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	785/865		785/865	
Net Depth / Gross Depth	mm	972/1.055		1.242 / 1.325	
Net Height / Gross Height	mm	1.980/2.126		1.980/2.126	
Net weight / Gross weight	Kg	260/268		290/303	
OTHERS					
Max airflow	m3/h	1000		1000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

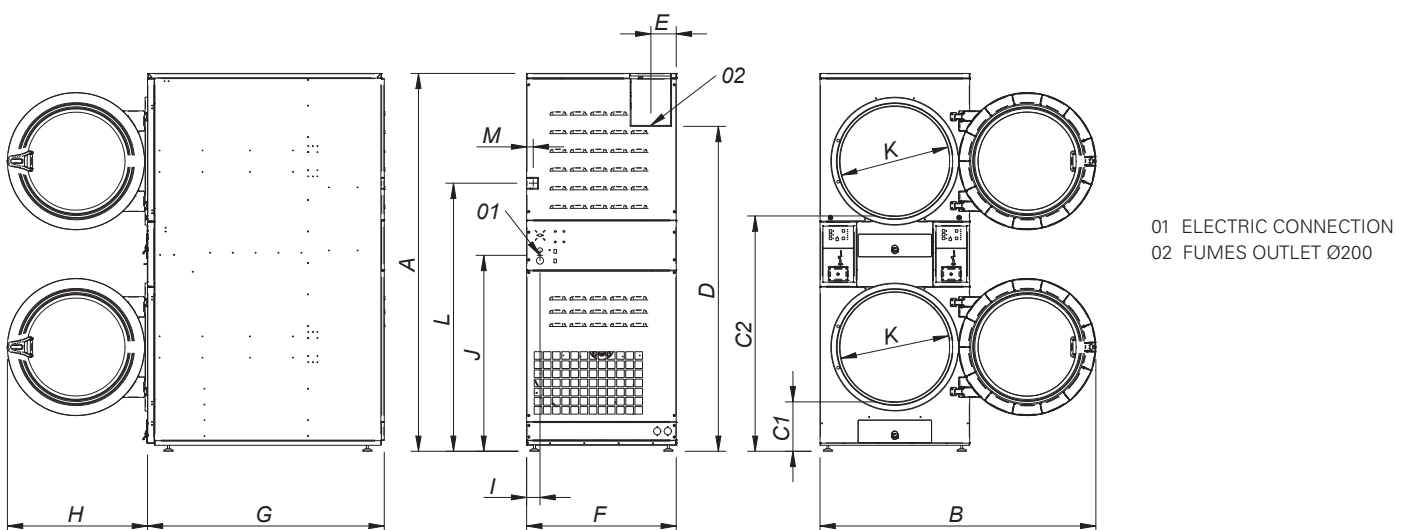

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
STD-11	1980	1447	259	1234	1620	135	785	972	735	64	1031	575	1406	35
STD-16	1980	1447	259	1234	1620	135	785	1242	735	64	1031	575	1406	35