



#### EASY TOUCH 2

4,3" touch screen user friendly and programmable ET2  
USB Connection. PC software free of charge for  
programming, traceability, data analysis...  
Videos on display (ads, instructions, etc.)  
37 languages



#### OUTSTANDING FEATURES

Reversing drum action as standard  
Stainless steel drum as standard  
Frequency inverter as standard



#### EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow  
Big fluff filter



#### VERSATILITY

Make to order - customisation

#### WET CLEANING

OPL > Multivending - Standard OPL model easily trans-  
formable to coin laundry uses



#### CONNECTIVITY

Remote technical service  
Managemnt of laundries: OPL and COIN  
Remote payment



#### ERGONOMICS

Drawer as fluff filter, made of stainless steel  
Biggest door diameters  
Reverse door opening



#### MAINTENANCE

Hinged panel: easy and ergonomic access  
Technical menu: statistics, alarm, autotest, data  
recovery for technicians and maintenance



#### OTHERS

Grey skinplate outer casing, stainless steel look  
Transmission by direct drive  
SOFT DRY - new drum with stamped holes  
COOL DOWN - anti-wrinkle at the end of the cycle  
Electric or gas heating  
CE approved




## OPTIONS

- CARE DRY - Intelligent humidity control
- Double doorglass
- Tropicalized model
- SPRINKLER - Integrated Fire Extinguishing System
- Exhaust silencer Ø 200 mm
- Printer
- Danube Online communication kit
- Rear panel external air + filter
- Stainless steel AISI 304 outercasing
- Stainless steel AISI 304 frontal panel
- Wooden packing
- Ship voltage for electric models:  
440V III 50/60 Hz No neutral

TECHNICAL DATA	UNIT.	STD-11 SILVER ET2	STD-16 / STD-16 G TURBO		
<b>CAPACITY</b>					
Capacity 1/18	Kg	23	37		
Capacity 1/20	Kg	22	34		
Hourly Output*	Kg/h	34,5	36,3 (76 STD16 G PLUS)		
Evaporation capacity*	l/h	16,5	18,6		
<b>DRUM</b>					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547/1.522	547/1.522		
Load hole bottom height	mm	260/1.235	260/1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
<b>POWER</b>					
Drum motor power	Kw	0,37x2	0,37x2		
Fan motor power STACK SILVER	Kw	0,25x2	0,25x2		
Electric heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (elec.model) STACK SILVER	Kw	25,34	25,34		
Gas heating power ALL RANGES	Kw	12x2	12x2		
Total electric power (gas model) STACK SILVER	Kw	1,34	1,34		
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net width / Gross width	mm	785/865		785/865	
Net Depth / Gross Depth	mm	972/1.055		1.242 /1.325	
Net Height / Gross Height	mm	1.980/2.126		1.980/2.126	
Net weight / Gross weight	Kg	260/268		290/303	
<b>OTHERS</b>					
Max airflow	m3/h	1000		1000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

\* It may vary depending on the type of heating, filter cleanliness or extraction type.

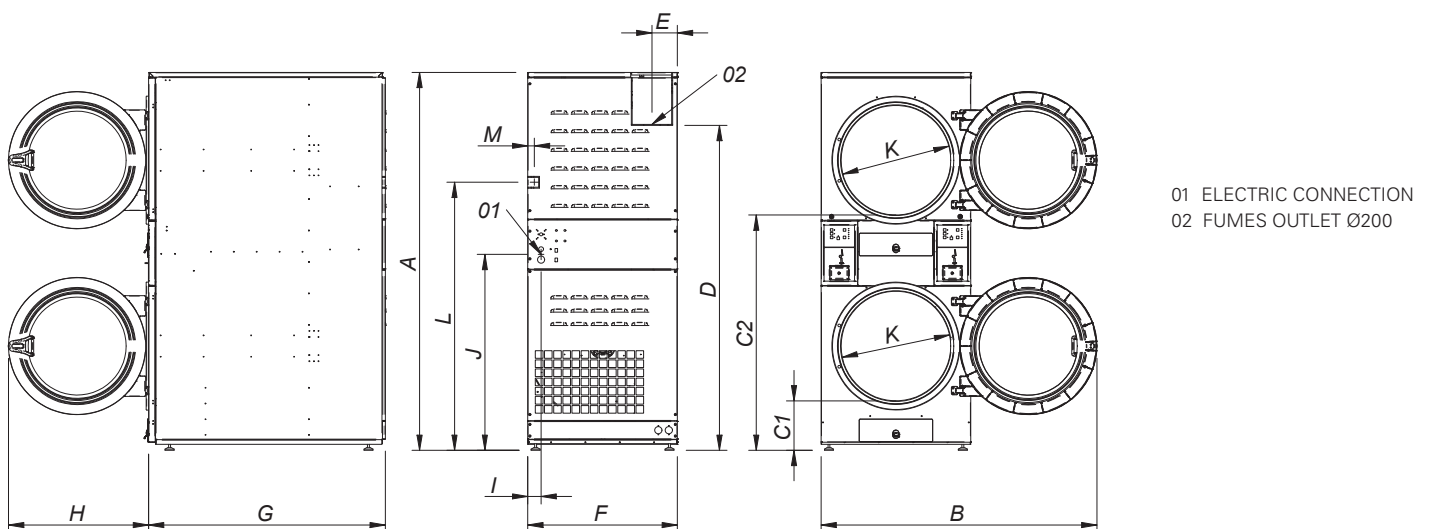

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M
STD-11	1980	1447	259	1234	1620	135	785	972	735	64	1031	575	1406	35
STD-16	1980	1447	259	1234	1620	135	785	1242	735	64	1031	575	1406	35