



BARRIER WASHER EXTRACTORS AS-100 ET2 PULLMAN

EASY TOUCH 2



7" touch screen easy to use and fully programmable
ET2, double display
Connection USB. PC software free of charge for programming, traceability, data analysis...
Videos on display (instructions...)
37 languages
8 dosing signals as standard

OUTSTANDING FEATURES



Automatic positioning of drum with motor brake and UPS system (safety in case of power failure)
3 water inlets
Double drain
WET CLEANING, traceability as standard
G FACTOR 325

EFFICIENCY



Intelligent consumption, automatic adjustment and Optimal loading, manual adjustment of water levels and detergents according to the load
High G factor : reduced residual moisture, reduced drying time
Water savings: 3 configurable levels of savings

CONNECTIVITY



Remote technical service
Management of laundry

ERGONOMICS



Huge loading and unloading doors opening
Easy drum opening
Loading height (960 mm from door bottom)

MAINTENANCE



Electric elements on left side, mechanical ones on right side, connections on the top (protected from detergents and water splashes)
Technical menu : statistics, alarms, autotest, data recovery for technicians and maintenance

OTHERS



2 opposed doors
Grey skinplate outer casing.
Stainless steel AISI 304 vat and drum
Electronic control of imbalance with frequency inverter
Electric or steam heating
Compressed air required (air compressor 50 lt, air pressure 7 bar)
CE approved



OPTIONS

- 6 extra dosing signals
- Printer
- Titration valve
- 4 compartments detergent box kit
- Stainless steel AISI 304 outer casing
- Stainless steel sanitary frame
- Dual electric - steam heating
- End of cycle light alarm
- Marine voltage 440V/60Hz/III without Neutral (electric models)
- Other voltage 230V III 50-60 Hz




Intertek



Intertek

TECHNICAL DATA	UNIT.	AS 100 ET2	
DRUM			
Capacity 1:9 / 1:10	Kg	100 / 90	
Volume	l	900	
Diameter	mm	1.050	
Depth	mm	1.032	
No of drum compartment	No	2	
GENERAL DETAILS			
Washing / spin speed	r.p.m.	45 / 750	
G Factor	-	325	
Dynamic force	KN	5,24	
Dynamic force frequency	Hz	15,4	
Sound level	dB	<70	
Double drain	-	STD	
Weighing system	-	NO	
DRUM			
Height door bottom	mm	960	
Drum opening dimensions	mm	900 x 500	
Vat opening dimensions	mm	960 x 700	
POWER			
Motor	kW	15	
Electric heating	kW	60	
Total electric power (elec mod)	kW	75	
Total electric power (steam mod)	kW	15	
CONNECTIONS		ELECTRIC / DUAL	STEAM
Tension 230V - I + N + T	N° x mm2 / A	-	-
Tension 230V - III + T	N° x mm2 / A	-	4 x 10 / 40A
Tension 400V - III + N + T	N° x mm2 / A	5 x 25 / 120A	5 x 6 / 25A
steam inlet (steam mod)	Inch	3/4"	
Max. steam consumption (steam models)	Kg/h	34,2	
Water inlet	Inch	1"	
Water pressure	Kgs/cm ²	3-5	
Max. water consumption*	Lit/h	900	
Air inlet	mm	8	
Air consumption	Nl/min	10	
Drain	Inch	2 x 3"	
Drain flow	Lit/min	2 x 160	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	1.677 / 1.890	
Net depth / Gross depth	mm	1.346 / 1.540	
Net height / Gross height	mm	1.964 / 2.030	
Net weight / Gross weight	kg	1.900 / 1.958	
Volume	m ³	4,43 / 5,91	

* Programme N°2, load 100%

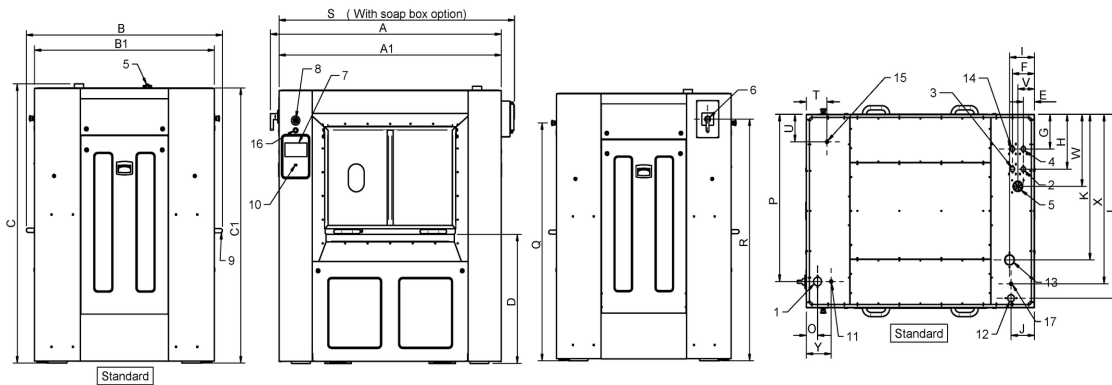

- 1 ELECTRICAL CONNECTION
- 2 COLD WATER INLET
- 3 SOFT WATER INLET
- 4 HOT WATER INLET
- 5 LIQUID PRODUCTS INLET
- 6 MAIN SWITCH
- 7 CONTROL PANEL
- 8 EMERGENCY STOP
- 9 DOOR OPENING
- 10 USB PORT
- 11 DOSING PUMPS CONNECTION
- 12 STEAM INLET
- 13 EXHAUST
- 14 COLD WATER DETERGENT BOX
- 15 COMPRESSED AIR CONNECTION
- 16 MANUAL DRUM ROTATION
- 17 COMPRESSED AIR STEAM VALVE

	A	B	C	A1	B1	C1	D	E	F	G	H	I	J	K	L	O	P	Q	R	S	T	U	V	W	X	Y
AS 100	1742	1468	1982	1677	1346	1954	921	82	162	262	382	183	172	1013	1279	83	1163	1737	1765	1777	150	192	122	502	1179	183