

DONNÉES TECHNIQUES REPASSEUSES / WALL IRONERS TECHNICAL DATA

| | UNIT. | R2D18-100 | R2D18-120 | R2D25-100 | R2D25-120 | R2D25-140 | R2D25-200 |
|------------------------------------------------------------------------------------|--------|--------------------|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| GÉNÉRALITÉS / GENERAL DETAILS | | | | | | | |
| Production théorique 20-25 % d'humidité Theoretical production 20-25 % humidity | Kg/h | 15 | 20 | 30 | 35 | 40 | 55 |
| Ø Rouleau Ø Roll | mm | 180 | 180 | 250 | 250 | 250 | 250 |
| Largeur utile Working width | mm | 1000 | 1200 | 1000 | 1200 | 1400 | 2000 |
| Vitesse de travail Working speed | mt/min | 2,02 | 2,02 | 4,2 | 4,2 | 4,2 | 4.2 |
| Programmeur électronique Electronic Control | | Oui/Yes | Oui/Yes | Oui/Yes | Oui/Yes | Oui/Yes | Oui/Yes |
| Mouvement cuvette Bed lifting | | Manual | Manual | Auto | Auto | Auto | Auto |
| PUISSANCE / POWER | | | | | | | |
| Puissance des résistances Heating Power | kW | 3,3 | 4 | 4,95 | 6 | 7 | 12 |
| Puissance moteur du rouleau Roller Motor Power | kW | 0,03 | 0,03 | 0,18 | 0,18 | 0,18 | 0,18 |
| Puissance électrique totale Total electric Power | kW | 3,33 | 4,03 | 5,13 | 6,18 | 7,18 | 12,18 |
| Tension Tension | V | 230V I 50/60 Hz | 230V I 50/60 Hz | 400V III 50 Hz (option 230V I) | 400V III 50 Hz (option 230V I) | 400V III 50 Hz (option 230V I) | 400V III 50 Hz (option 230V I) |
| DIMENSIONS / DIMENSIONS | | | | | | | |
| Largeur Width | mm | 1.370 | 1.570 | 1.462 | 1.662 | 1.862 | 2.462 |
| Profondeur Depth | mm | 400 | 400 | 484 | 484 | 484 | 484 |
| Hauteur Height | mm | 952 | 952 | 985 | 985 | 985 | 985 |
| Poids Weight | Kg | 80 | 90 | 114 | 124 | 134 | 164 |
| Volume Volume | m³ | 0,52 | 0,6 | 0,69 | 0,79 | 0,89 | 1,17 |
| DIMENSIONS AVEC EMBALLAGE / DIMENSIONS WITH PACKAGING | | | | | | | |
| Largeur Width | mm | 1.490 | 1.690 | 1.490 | 1.690 | 1.890 | 2.490 |
| Profondeur Depth | mm | 540 | 540 | 540 | 540 | 540 | 540 |
| Hauteur Height | mm | 1.130 | 1.130 | 1.130 | 1.130 | 1.130 | 1.130 |
| Poids Weight | Kg | 100 | 110 | 124 | 134 | 154 | 184 |
| Volume Volume | m³ | 0,91 | 1,03 | 0,91 | 1,03 | 1,15 | 1,51 |
| AUTRES / OTHERS | | | | | | | |
| Niveau sonore Noise Level | dB | 55 | 55 | 55 | 55 | 55 | 55 |

* DANUBE se réserve le droit de modifier les données sans préavis. / DANUBE reserves the right to modify the technical data without notice.



www.danube-international.com
www.danube.fr

<https://www.danube-romania.ro>
office@danube-romania.ro



ONNERA GROUP

REPASSEUSES MURALES

WALL IRONERS



REPASSEUSES MURALES

POUR UNE PARFAITE QUALITE DE REPASSAGE

Simple, reliable, robust and economical. The new range of wall ironers is the perfect choice for establishments that do not need large production, but for which the level of investment constitutes an important factor. Easy to use, they are ideal for small quantities of flat linen in establishments such as restaurants, small hotels, inns, etc.

Electrically heated and offering two roller diameters (180 and 250 mm), they require a pre-drying passage in a clothes dryer to reach the 20-25% humidity needed for optimal ironing quality. Equipped with a simple mechanism that makes them reliable and durable, these machines represent the most economical and safest option for a small laundry.

Wall-mounted and of small dimensions, they can be placed in very reduced spaces and require only a simple installation as they do not have air exhaust or connections other than to the electrical supply.

- ✓ Introduction and reception of linen from the front.
- ✓ Side panels in skinplate and top panel in stainless steel.
- ✓ Roll dimensions: from 1 to 2 meters wide and diameter of 180 and 250 mm.
- ✓ **Electronic control for temperature control.**
- ✓ Electric heating.
- ✓ Manual bed lowering by pedal on model ø 180, automatic by detection cell on model ø 250
- ✓ Roller covered in polyester and cotton cover.
- ✓ **Nomex model:** possibility to work at higher temperatures, up to 190 °C.

WALL IRONERS

WHEN PERFECT IRONING IS A MUST

User-friendly, reliable, robust and not expensive. The new range of wall ironers is the ideal choice for those laundries which do not have a big output but where the investment point matters. Its easy use makes them perfect to iron the flatwork from restaurants, small hotels, YMCA, etc.

Electrically heated, there are two versions, diameter 180 and 250 mm. The linen needs previous drying in a tumbler to get the moisture of 20-25% which will provide the optimum ironing results. Their simple mechanism makes them reliable and long-lasting, being the cheapest option for the smaller laundries.

These machines are small in dimensions and mural, so they can be placed in a reduced space, with hardly installation as they do not have air exhaust or connections except electric supply.

- ✓ Front feed and return.
- ✓ Panels in skin plate. Top panels in stainless steel.
- ✓ Roll dimensions: from 1.000 to 2.000 mm wide and diameter from 180 to 250 mm.
- ✓ **Electronic control of temperature**
- ✓ Electric heating.
- ✓ Manual bed lifting by pedal on ø 180, automatic by detection cell on model ø 250
- ✓ Roll covered in polyester and cotton felt.
- ✓ **Nomex model:** possibility to work at higher temperatures, up to 190°C.

R2D18



Programmeur électronique

Microprocesseur avec bouton marche/arrêt et sélection de 4 températures (modèles ø 180)

Electronic control

Microprocessor with push button start/stop and selection of 4 temperatures (ø 180 models).



Maintenance aisée

Installation facile, encombrement minimum.

Easy maintenance

Easy to install, minimal size.



Commande manuelle par pédale
Manual control by pedal

R2D25




Microprocesseur électronique

Ecran digital, contrôle précis de la température (modèles ø 250)

Electronic Microprocessor

Touch screen, precise control of temperature (ø 250 models)

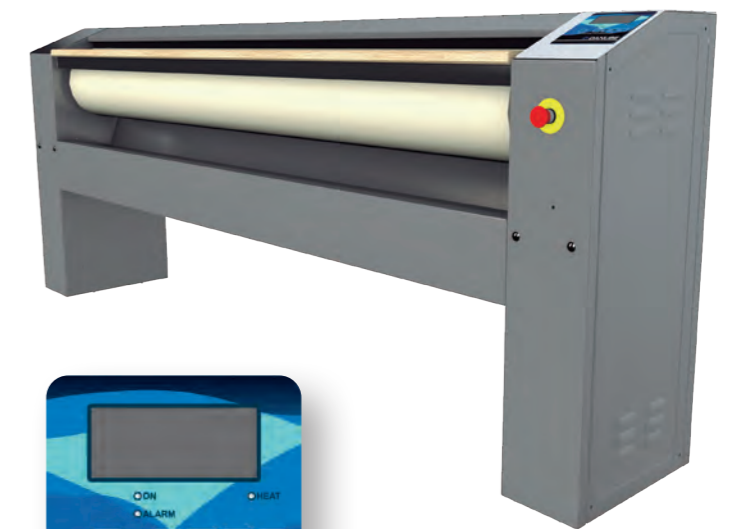

Commande automatique par cellule de détection au pied
Automatic control by detection cell



Maintenance aisée

Installation facile, encombrement minimum.

Easy maintenance

Easy to install, minimal size.

