



DD-SILVER ET2

TUMBLE

DRYERS

DD-11 / 14 / 16



EASY TOUCH 2

7" touch screen user friendly and programmable ET2
USB Connection. PC software free of charge for programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter



VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Opening sense of door adjustable on site



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric, gas and steam heating
CE approved



OPTIONS

- CARE DRY - Intelligent humidity control with new drum inlet temperature control
- Double doorglass
- Reverse door opening
- SPRINKLER - Integrated Fire Extinguishing System
- New perfumes dosing/vaporizing system
- Printer
- Danube Online IoT communication
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steam battery
- Low pressure steam battery
- Fluff filter with grid 0,6 or 1,2 mm (standard is 0,3 mm)
- Rear panel with external air inlet + filter




Intertek



Intertek

TECHNICAL DATA	UNIT.	DD-11 SILVER ET2	DD-14 SILVER ET2	DD-16 SILVER ET2			
CAPACITY							
Capacity 1/18	Kg	12	15	18			
Capacity 1/20	Kg	11	13,5	17			
Hourly Output SILVER*	Kg/h	23-21	34-30	35-33			
Evaporation capacity SILVER*	l/h	14,5	15,40	16,3			
DRUM							
Ø Drum	mm	750	750	750			
Ø Door	mm	574	574	574			
Door center height	mm	976	976	976			
Load hole bottom height	mm	689	689	689			
Drum length	mm	475	610	746			
Drum volume	l	210	270	330			
POWER							
Drum motor power	Kw	0,37	0,37	0,37			
Fan motor power SILVER	Kw	0,25	0,25	0,25			
Electric heating power ALL RANGES	Kw	12	18	18			
Total electric power (elec.model) SILV	Kw	12,67	18,67	18,67			
Gas heating power ALL RANGES	Kw	20,51	20,51	20,51			
Total electric power (gas model) SILV	Kw	0,67	0,67	0,67			
Steam heating power ALL RANGES	Kw	30	30	30			
Total electric power (steam mod.) SILV	Kw	0,67	0,67	0,67			
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	3 x 25 / 63A	3 x 1,5 / 20A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 10 / 40A	3 x 1,5 / 20A	4 x 16 / 63A	3 x 1,5 / 20A	4 x 16 / 63A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 4 / 25A	3 x 1,5 / 20A	5 x 10 / 32A	3 x 1,5 / 20A	5 x 10 / 32A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"	
Ø Steam inlet	BSP	3/4"		3/4"		3/4"	
Ø Condensed (Steam models)	BSP	3/4"		3/4"		3/4"	
DIMENSIONS / PACKING DIMENSIONS							
Net Width / Gross Width	mm	785 / 865		785 / 865		785 / 865	
Net Depth / Gross Depth	mm	855 / 940		989 / 1.074		1.125 / 1.210	
Net Height / Gross Height	mm	1.694 / 1.840		1.694 / 1.840		1.694 / 1.840	
Height without heating battery	mm	-		-		-	
Net weight / Gross weight	Kg	172 / 180		180 / 190		187 / 200	
OTHERS							
Max airflow SILVER	m3/h	850		850		850	
Ø Fume exhaust	mm	200		200		200	
Sound level SILVER	dB	64		64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

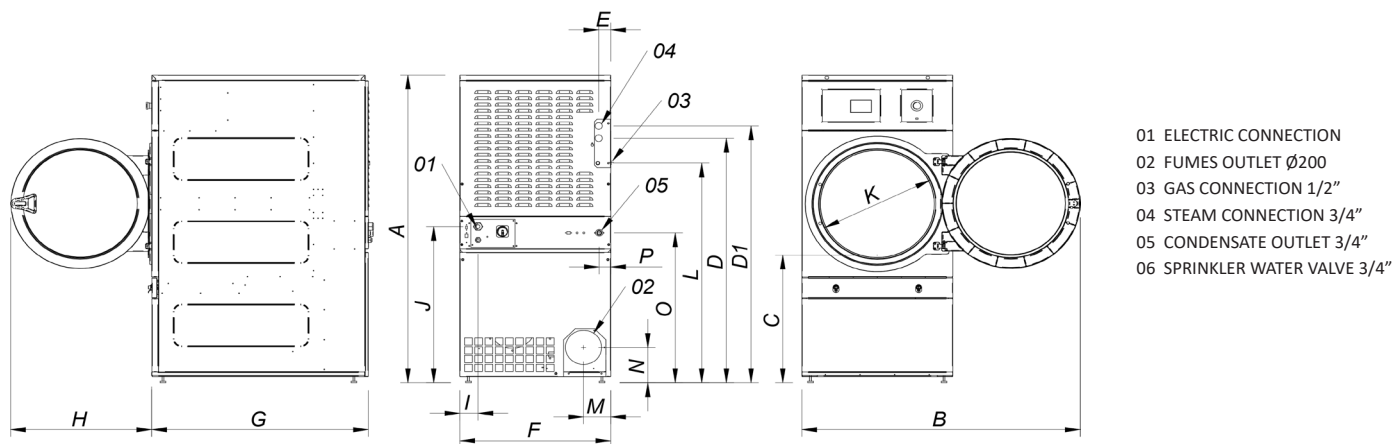

	A	B	C	D	D1	E	F	G	H	I	J	K	L	M	N	O	P
DD-11	1694	1447	689	1354	1422	68	785	855	735	95	870	575	1226	133	180	830	65
DD-14	1694	1447	689	1354	1422	68	785	989	735	95	870	575	1226	133	180	830	65
DD-16	1694	1447	689	1354	1422	68	785	1125	735	95	870	575	1226	133	180	830	65