



FLATWORK DRYER IRONERS

Ø 650 MM

G-20 / G-26 / G-33 ET2



EASY TOUCH 2

7" touch screen fully programmable
38 available languages
5 preset programs
USB connection. PC software free of charge for programming, traceability, data analysis
Reversing roll incorporated



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure
Automatic shutdown at 80°C
Fumes circulation circuit from the bottom reducing energy consumption
Radiant gas model: production improved by 25 %
CARE IRON: automatic regulation of ironing speed according to residual moisture
HPS: high production system, ironing speed up to 15 m/min



VERSATILITY

Radiant gas model: flexible, suitable for high altitude installations
Optional built-in length folder with or without rear exit option



ROBUSTNESS

Roll driving by speed inverter
Stainless steel and grey skinplate panels
Nomex quality feeding and ironing belts: high temperatures resistant
Chrome plate roll as option: anticorrosive, more durable



ERGONOMICS

Acoustic comfort : <65 dB
Appropriate operating height: 1120 mm feeding belts
Compact dimensions




MAINTENANCE

Easy access to all components on both sides of the machine
Connections : electrical connection and air extraction
Complete technical menu: statistics, autotest, data recovery for technician and maintenance
Remote communication: faster intervention



OTHERS

Dries and irons flat linen in a single operation
Front feeding and return
Built-in cool down system
Polished steel roll ø 650 mm
Working width: 2000, 2600 and 3300 mm
Electric, radiant gas or steam heating

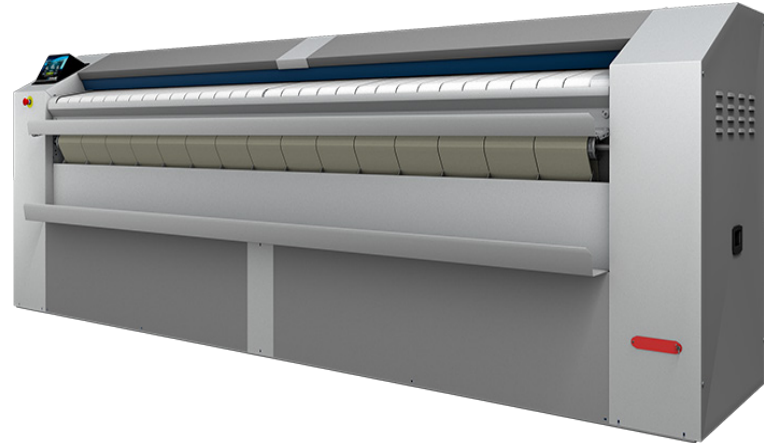

OPTIONS

- Built-in lengthwise folder
- Rear exit (only with folder)
- Chrome plate cylinder
- Marine tension 440V III 60 Hz without N (electric models)
- Tension 230V III 50-60 Hz




Intertek



Intertek

TECHNICAL DATA	UNIT.	G-20 ET2		G-26 ET2		G-33 ET2	
GENERAL DETAILS							
Theoretical production *	Kg/h	65-90		80-104		104-160	
Theoretical production radiant gas *	Kg/h	78-108		96-124		124-192	
Evaporation power	Kg/h	45-63		55-73		73-110	
Ø Roll	mm	650		650		650	
Working width	mm	2000		2600		3300	
Height of feeding belts	mm	1.120		1.120		1.120	
Ironing speed	m/min	1 - 15		1 - 15		1 - 15	
Control		ET2		ET2		ET2	
No programs	N°	5		5		5	
Rear exit + length folder		OPT		OPT		OPT	
POWER							
Electric heating	kW	42		54		72	
Total electric power (Elec. model)	kW	41,55		55,05		73,05	
Gas heating	kW	52		69		78	
Total electric power (Gas model)	kW	1,05		1,05		1,05	
Steam heating	kW	60		76		81	
Total electric power (Steam model)	kW	1,05		1,05		1,05	
Roll motor	kW	0,55		0,55		0,55	
Fan motor	kW	0,25 x 2		0,25 x 2		0,25 x 2	
Add. elec. power with folder	kW	0,56		0,56		0,56	
Add. elec. power with folder + rear exit	kW	0,74		0,74		0,74	
CONNECTIONS		ELECTRIC	GAS / STEAM	ELECTRIC	GAS / STEAM	ELECTRIC	GAS / STEAM
Tension 230V - III + T	N°x mm²/A	4x25 / 125A	4x2,5 / 6A	4x35 / 160A	4x2,5 / 6A	-	4x2,5 / 6A
Tension 400V - III + N + T	N°x mm²/A	5x16 / 63A	5x2,5 / 6A	5x25 / 100A	5x2,5 / 6A	5x25 / 125A	5x2,5 / 6A
Ø gas inlet	BSP	1/2"		1/2"		1/2"	
Ø steam inlet	BSP	3/4"		3/4"		3/4"	
Ø condensed (steam model)	BSP	1/2"		1/2"		1/2"	
DIMENSIONS / PACKING DIMENSIONS							
Net width / Gross width	mm	2.845 / 3.145		3.445 / 3.745		4.145 / 4.445	
Net depth / Gross depth	mm	1.070 / 1.153		1.070 / 1.153		1.070 / 1.153	
Net height / Gross height	mm	1.420 / 1.672		1.420 / 1.672		1.420 / 1.672	
Net weight / Gross weight	kg	1.189 / 1.231		1.517 / 1.567		1.765 / 1.815	
Volume	m3	4,08 / 6,06		4,96 / 7,22		5,98 / 8,57	
OTHERS							
No fume outlet	No	2		2		2	
Ø Extraction	mm	153		153		153	
Air flow	m3/h	1.200		1.200		1.200	
Noise level	dB	65		65		65	

*45 %-25 % moisture

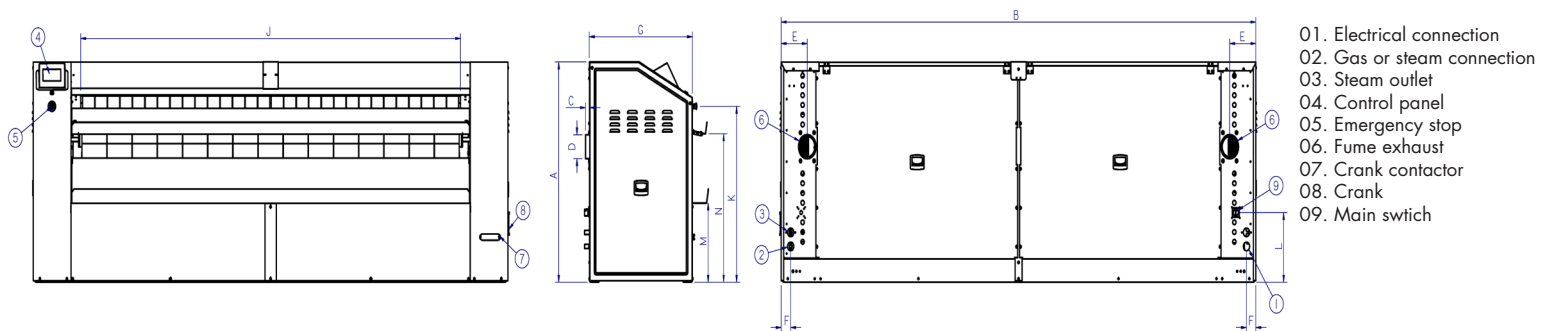

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
G-20	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
G-26	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
G-33	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952