




TECHNICAL DATA	UNIT.	M-20 ET2	M-26 ET2	M-33 ET2			
<b>GENERAL DETAILS</b>							
Theoretical production *	Kg/h	50-70	60-80	80-120			
Theoretical production radiant gas *	Kg/h	60-84	72-96	96-144			
Evaporation power	Kg/h	35-49	42-56	56-84			
Ø Roll	mm	500	500	500			
Working width	mm	2000	2600	3300			
Height of feeding belts	mm	1.120	1.120	1.120			
Ironing speed	m/min	1 - 8	1 - 8	1 - 8			
Control		ET2	ET2	ET2			
No programs	N°	5	5	5			
Rear exit + length folder		OPT	OPT	OPT			
<b>POWER</b>							
Electric heating	kW	31,5	40,5	54			
Total electric power (Elec. model)	kW	32,12	41,37	54,87			
Gas heating	kW	40	55	69			
Total electric power (Gas model)	kW	0,62	0,87	0,87			
Steam heating	kW	50	64	81			
Total electric power (Steam model)	kW	0,62	0,87	0,87			
Roll motor	kW	0,37	0,37	0,37			
Fan motor	kW	0,25	0,25 x 2	0,25 x 2			
Add. elec. power with folder	kW	0,56	0,56	0,56			
Add. elec. power with folder + rear exit	kW	0,74	0,74	0,74			
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>GAS / STEAM</b>	<b>ELECTRIC</b>	<b>GAS / STEAM</b>	<b>ELECTRIC</b>	<b>GAS / STEAM</b>
Tension 230V - III + T	N°x mm²/A	4x25 /100A	4x2,5 / 10A	4x25 / 125A	4x2,5 / 10A	4x35 / 160A	4x2,5 / 10A
Tension 400V - III + N + T	N°x mm²/A	5x16 / 63A	5x2,5 / 10A	5x16 / 80A	5x2,5 / 10A	5x25 / 100A	5x2,5 / 10A
Ø gas inlet	BSP	1"		1"		1"	
Ø steam inlet	BSP	3/4"		3/4"		3/4"	
Ø condensed (steam model)	BSP	1/2"		1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Net width / Gross width	mm	2.845 / 3.145		3.445 / 3.745		4.145 / 4.445	
Net depth / Gross depth	mm	1.070 / 1.153		1.070 / 1.153		1.070 / 1.153	
Net height / Gross height	mm	1.420 / 1.672		1.420 / 1.672		1.420 / 1.672	
Net weight / Gross weight	kg	930 / 972		1.180 / 1.470		1.430 / 1.480	
Volume	m3	4,08 / 6,06		4,96 / 7,22		5,98 / 8,57	
<b>OTHERS</b>							
No fume outlet	No	1		2		2	
Ø Extraction	mm	153		153		153	
Air flow	m3/h	600		1.200		1.200	
Noise level	dB	65		65		65	

\*45 %-25 % moisture

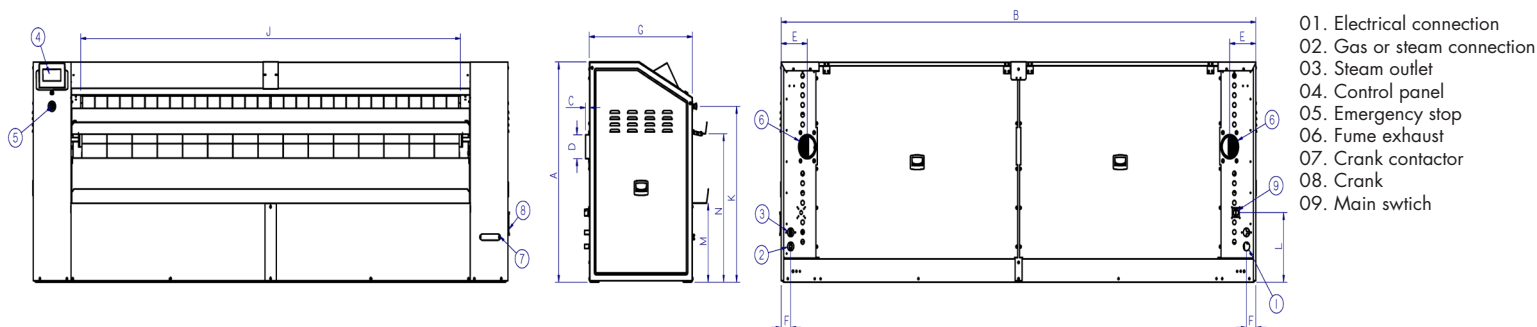

	A	B	C	D	E	F	G	H	I	J	K	L	M	N
M-20	1.420	2.845	36	Ø152	228	83	897	2.160	1.079	2.004	1.128	447	509	952
M-26	1.420	3.445	36	Ø152	228	83	897	2.760	1.079	2.604	1.128	447	509	952
M-33	1.420	4.145	36	Ø152	228	83	897	3.460	1.079	3.304	1.128	447	509	952