



FLATWORK DRYER IRONERS

Ø 200 MM

MICRAII



ELECTRONIC CONTROL

Simple and user friendly: selection of ironing speed and temperature by push buttons



EFFICIENCY

Good heat conduction thanks to the roll material and thickness: greater control of energy expenditure
Automatic shutdown at 80°C
Fumes circulation circuit from the bottom reducing energy consumption



ROBUSTNESS

Roll driving by speed inverter
Nomex quality feeding and ironing belts: high temperatures resistant



ERGONOMICS

Acoustic comfort : <60 dB
Appropriate operating height: 990 mm feeding belts
Minimal encumbrance: space saving, suitable for most spaces




MAINTENANCE

Easy access to all components on both sides of the machine
Basic connections : electrical connection and air extraction
Dimensions of all models without trays narrower than a door frame: 546 mm



OTHERS

Dries and irons flat linen from a high spin washer extractor in a single operation
Front feeding and return
Built-in cool down system
Polished steel roll Ø 200 mm
Working width: 1400 mm
Electric heating

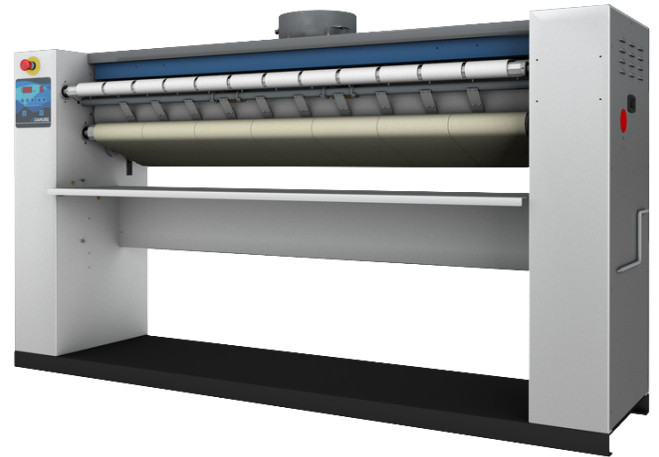

OPTIONS

- Marine tension 440V III 60 Hz without N
- Tension 230V III 50-60 Hz




Intertek



Intertek

TECHNICAL DATA	UNIT.	MICRAII	
GENERAL DETAILS			
Theoretical production *	Kg/h	12-14	
Theoretical production radiant gas *	Kg/h	-	
Evaporation power	Kg/h	8-10	
Ø Roll	mm	200	
Working width	mm	1400	
Height of feeding belts	mm	990	
Ironing speed	m/min	1 - 5	
Control		Electronic	
No programs	N°	7	
Rear exit + length folder		NO	
POWER			
Electric heating	kW	10,5	
Total electric power (Elec. model)	kW	10,84	
Gas heating	kW	-	
Total electric power (Gas model)	kW	-	
Steam heating	kW	-	
Total electric power (Steam model)	kW	-	
Roll motor	kW	0,25	
Fan motor	kW	0,09	
Add. elec. power with folder	kW	-	
Add. elec. power with folder + rear exit	kW	-	
CONNECTIONS		ELECTRIC	GAS
Tension 230V - III + T	N°x mm²/A	4x6 / 32A	-
Tension 400V - III + N + T	N°x mm²/A	5x4 / 20A	-
Ø gas inlet	BSP	-	
Ø steam inlet	BSP	-	
Ø condensed (steam model)	BSP	-	
DIMENSIONS / PACKING DIMENSIONS			
Net width / Gross width	mm	1.878 / 2.130	
Net depth / Gross depth	mm	444 / 770	
Net height / Gross height	mm	1.335 / 1.570	
Net weight / Gross weight	kg	180 / 220	
Volume	m3	1,11 / 2,57	
OTHERS			
No fume outlet	No	1	
Ø Extraction	mm	83	
Air flow	m3/h	300	
Noise level	dB	55	

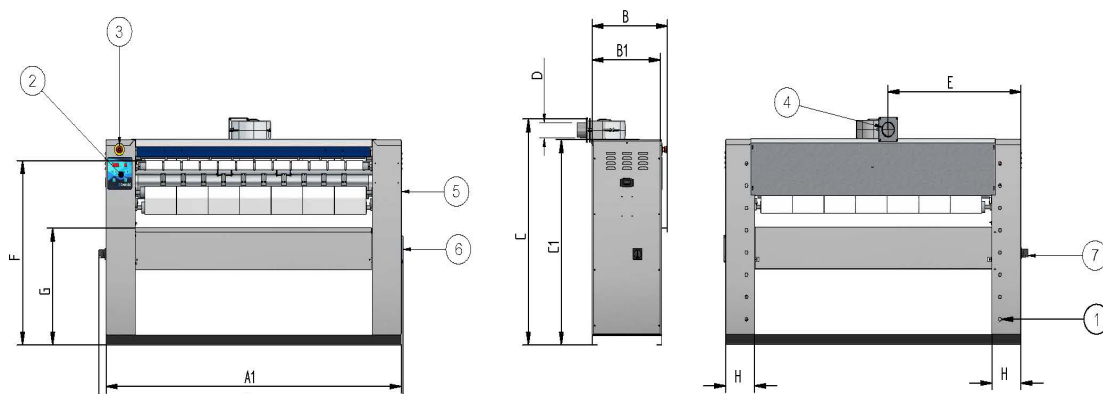

*45 %-25 % moisture

- 01. Electrical connection
- 02. Control panel
- 03. Emergency stop
- 04. Exhaust
- 05. Crank contactor
- 06. Crank
- 07. Main switch

	A	B	C	A1	B1	C1	D	E	F	G	H	I
MICRA II	1.885	448	1.335	1.878	444	1.110	Ø 83	1.020	1.000	635	21	-