



STD-BASIC EM TUMBLE DRYERS STD-11 / 16



EM PROGRAMMER

Easy-to-use electronic control with push buttons to control temperature and time



OUTSTANDING FEATURES

Galvanised drum as standard
Reversing drum action as standard
Frequency inverter as standard



EFFICIENCY

Big fluff filter
New **PLUS** model, gas heated: more powerful to achieve more productivity (see specific datasheet)



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters




MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with external console



OTHERS

White painted panels
Transmission by direct drive
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved

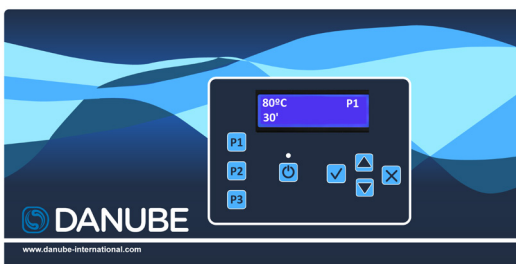

EM programmer + new display

OPTIONS

- New display for EM programmer (2 units)
- Fluff filter with grid 0,3 mm (standard is 0,6 mm)




Intertek



Intertek

TECHNICAL DATA	UNIT.	STD-11 BASIC EM	STD-16 BASIC EM		
CAPACITY					
Capacity 1/18	Kg	23	37		
Capacity 1/20	Kg	22	34		
Hourly Output*	Kg/h	2 x 14 / 2 x 13	2 x 21 / 2 x 20		
Evaporation capacity*	l/h	16,50	25,50		
DRUM					
Ø Drum	mm	750	750		
Ø Door	mm	574	574		
Door center height	mm	547 / 1.522	547 / 1.522		
Load hole bottom height	mm	260 / 1.235	260 / 1.235		
Drum length	mm	475	746		
Drum volume	l	210	330		
POWER					
Drum motor power	kW	0,37 x 2	0,37 x 2		
Fan motor power STD BASIC	kW	0,25 x 2	0,25 x 2		
Electric heating power ALL RANGES	kW	12 x 2	12 x 2		
Total electric power (elec.model) STD BASIC	kW	25,35	25,35		
Gas heating power ALL RANGES	kW	12 x 2	12 x 2		
Total electric power (gas model) STD BASIC	kW	1,34	1,34		
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	785 / 865		785 / 865	
Net Depth / Gross Depth	mm	972 / 1.055		1.242 / 1.325	
Net Height / Gross Height	mm	1.980 / 2.126		1.980 / 2.126	
Net weight / Gross weight	mm	260 / 268		290 / 303	
OTHERS					
Max airflow	m3/h	1.000		1.000	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

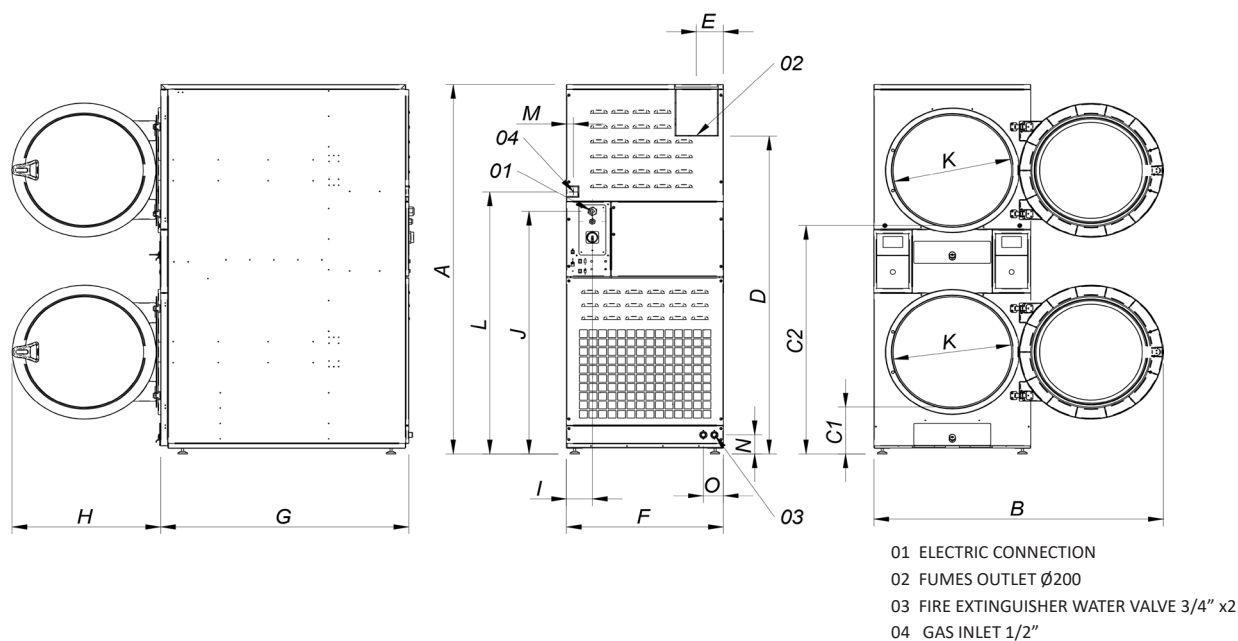

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
STD-11	1980	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	103	100
STD-16	1980	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	103	100