



STD-BRONZE EM TUMBLE DRYERS STD-11 / 16



EM PROGRAMMER

Easy-to-use electronic control with push buttons to control temperature and time



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter
New **PLUS** model, gas heated: more powerful to achieve more productivity (see specific datasheet)



VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters




MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with external console



OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved

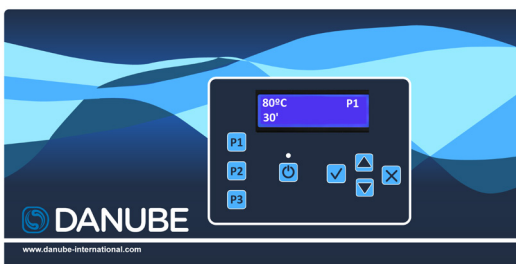

EM programmer + new display

OPTIONS

- New display for EM programmer (2 units)
- Double doorglass
- Reverse door opening
- Rear panel with external air inlet + filter
- Stainless steel outer casing
- Stainless steel front panel
- Fluff filter with grid 0,3 mm (standard is 0,6 mm)




Intertek



Intertek

| TECHNICAL DATA | UNIT. | STD-11 BRONZE EM | STD-16 BRONZE EM | | |
|--|--------------|-------------------|------------------|-------------------|---------------|
| CAPACITY | | | | | |
| Capacity 1/18 | Kg | 23 | 37 | | |
| Capacity 1/20 | Kg | 22 | 34 | | |
| Hourly Output* | Kg/h | 2 x 14 / 2 x 13 | 2 x 21 / 2 x 20 | | |
| Evaporation capacity* | l/h | 16,50 | 25,50 | | |
| DRUM | | | | | |
| Ø Drum | mm | 750 | 750 | | |
| Ø Door | mm | 574 | 574 | | |
| Door center height | mm | 547 / 1.522 | 547 / 1.522 | | |
| Load hole bottom height | mm | 260 / 1.235 | 260 / 1.235 | | |
| Drum length | mm | 475 | 746 | | |
| Drum volume | l | 210 | 330 | | |
| POWER | | | | | |
| Drum motor power | kW | 0,37 x 2 | 0,37 x 2 | | |
| Fan motor power STD BRONZE | kW | 0,25 x 2 | 0,25 x 2 | | |
| Electric heating power ALL RANGES | kW | 12 x 2 | 12 x 2 | | |
| Total electric power (elec.model) STD BRONZE | kW | 25,35 | 25,35 | | |
| Gas heating power ALL RANGES | kW | 12 x 2 | 12 x 2 | | |
| Total electric power (gas model) STD BRONZE | kW | 1,34 | 1,34 | | |
| CONNECTIONS | | ELECTRICAL | GAS | ELECTRICAL | GAS |
| Tension 230V - I + N + T | N° x mm2 / A | - | 3 x 1,5 / 20A | - | 3 x 1,5 / 20A |
| Tension 230V - III + T | N° x mm2 / A | 4 x 25 / 80A | 3 x 1,5 / 20A | 4 x 25 / 80A | 3 x 1,5 / 20A |
| Tension 400V - III + N + T | N° x mm2 / A | 5 x 10 / 40A | 3 x 1,5 / 20A | 5 x 10 / 40A | 3 x 1,5 / 20A |
| Ø Gas inlet | BSP | 1/2" | | 1/2" | |
| DIMENSIONS / PACKING DIMENSIONS | | | | | |
| Net width / Gross width | mm | 785 / 865 | | 785 / 865 | |
| Net Depth / Gross Depth | mm | 972 / 1.055 | | 1.242 / 1.325 | |
| Net Height / Gross Height | mm | 1.980 / 2.126 | | 1.980 / 2.126 | |
| Net weight / Gross weight | mm | 260 / 268 | | 290 / 303 | |
| OTHERS | | | | | |
| Max airflow | m3/h | 1.000 | | 1.000 | |
| Ø Fume exhaust | mm | 200 | | 200 | |
| Sound level | dB | 64 | | 64 | |

* It may vary depending on the type of heating, filter cleanliness or extraction type.

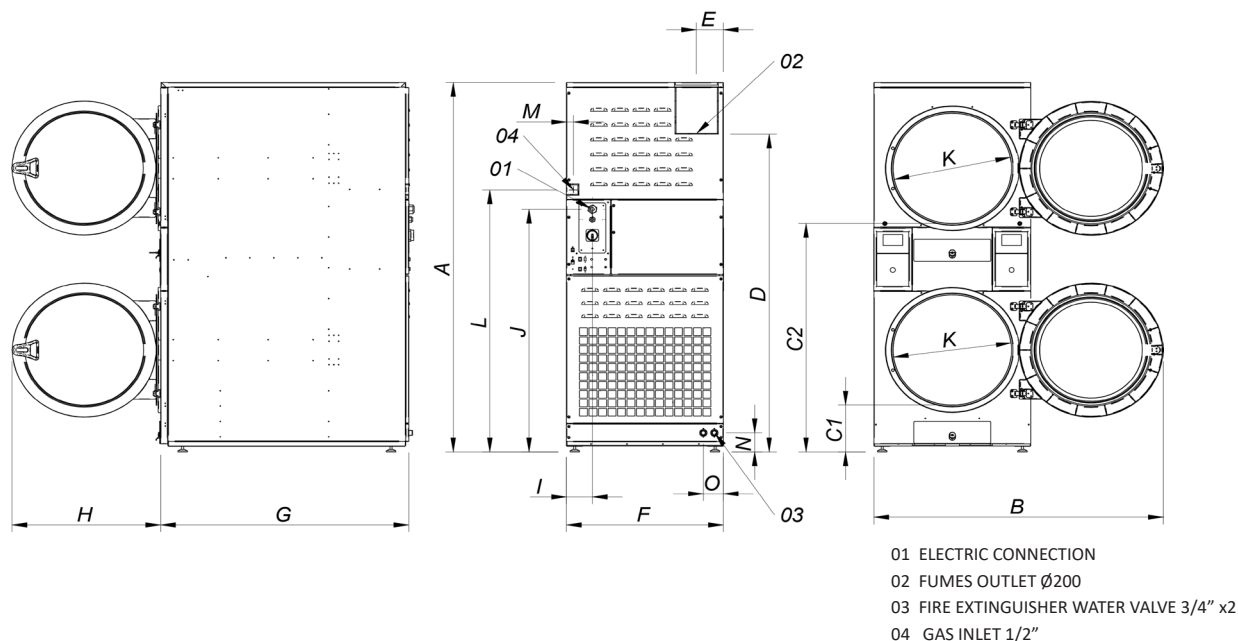

| | A | B | C1 | C2 | D | E | F | G | H | I | J | K | L | M | N | O |
|--------|------|------|-----|------|------|-----|-----|------|-----|-----|------|-----|------|----|-----|-----|
| STD-11 | 1980 | 1447 | 259 | 1234 | 1680 | 135 | 785 | 972 | 735 | 130 | 1275 | 575 | 1406 | 35 | 103 | 100 |
| STD-16 | 1980 | 1447 | 259 | 1234 | 1680 | 135 | 785 | 1242 | 735 | 130 | 1275 | 575 | 1406 | 35 | 103 | 100 |