

EM PROGRAMMER

Easy-to-use electronic control with push buttons to control temperature and time

OUTSTANDING FEATURES

Galvanised drum as standard
Reversing drum action as standard
Frequency inverter as standard

EFFICIENCY

% L J À X ‡ ¿ O W H U
New PLUS model, gas heated: more powerful to achieve more productivity

VERSATILITY

Make to order - customisation
OPL > Multivending - Standard OPL model easily transformable to coin laundry uses

ERGONOMICS

' U D Z H U D V À X ‡ ¿ O W H U P D G H R I V W D L Q O H V V V W H H O
Biggest door diameters

MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with external console

OTHERS

White painted panels
Transmission by direct drive
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved


OPTIONS

- New display for EM programmer (2 units)
-) O X ‡ ¿ O W H U Z L W K J U L G (mm)

P P

TECHNICAL DATA	UNIT.	STD-16 G PLUS
CAPACITY		
Capacity 1/18	Kg	37
Capacity 1/20	Kg	34
Hourly Output*	Kg/h	2 x 39
Evaporation capacity*	l/h	35,30
DRUM		
Ø Drum	mm	750
Ø Door	mm	574
Door center height	mm	547 / 1.522
Load hole bottom height	mm	260 / 1.235
Drum length	mm	746
Drum volume	l	330
POWER		
Drum motor power	kW	0,37 x 2
Fan motor power STD BASIC	kW	0,55 x 2
Electric heating power ALL RANGES	kW	N/A
Total electric power (elec.model) STD BASIC	kW	N/A
Gas heating power ALL RANGES	kW	24 x 2
Total electric power (gas model) STD BASIC	kW	1,94
CONNECTIONS		
GAS		
Tension 230V - I + N + T	Nº x mm2 / A	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	785 / 865
Net Depth / Gross Depth	mm	1.443 / 1.457
Net Height / Gross Height	mm	1.980 / 2.126
Net weight / Gross weight	mm	320 / 349
OTHERS		
Max airflow	m3/h	2 x 750
Ø Fume exhaust	mm	2 x 200
Sound level	dB	64

* It may vary depending on the type of heating, filter cleanliness or extraction type.

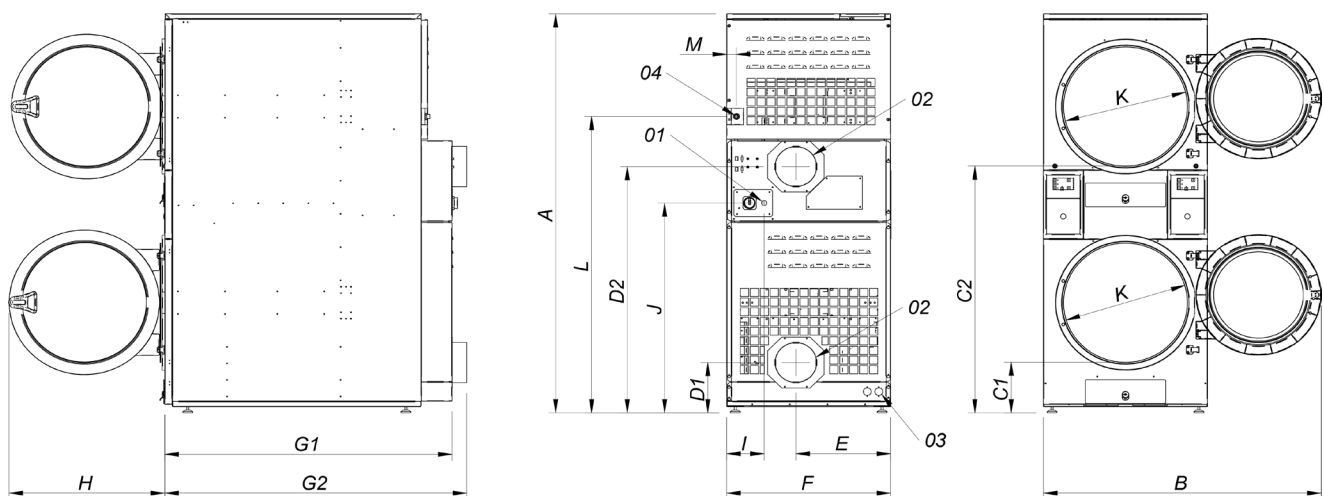

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTLET Ø200
- 03 FIRE EXTINGUISHER WATER VALVE 3/4" x2
- 04 GAS INLET 1/2"

	A	B	C1	C2	D1	D2	E	F	G1	G2	H	I	J	K	L	M
STD-16 PLUS	1980	1447	259	1234	250	1223	454	785	1374	1443	735	180	1017	575	1472	45