



STD-SILVER ET2 TUMBLE DRYERS STD-16 G PLUS



EASY TOUCH 2

7" touch screen user friendly and programmable ET2
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions, etc.)
37 languages



OUTSTANDING FEATURES

Reversing drum action as standard
Stainless steel drum as standard
Frequency inverter as standard



EFFICIENCY

DOUBLE FLOW - mixed axial-radial airflow
Big fluff filter
New **PLUS** model, gas heated: more powerful to
achieve more productivity



VERSATILITY

Make to order - customisation
WET CLEANING
OPL > Multivending - Standard OPL model easily tras-
formable to coin laundry uses



CONNECTIVITY

Remote technical service
Managemnt of laundries: OPL and COIN
Remote payment



ERGONOMICS

Drawer as fluff filter, made of stainless steel
Biggest door diameters
Reverse door opening



MAINTENANCE

Hinged panel: easy and ergonomic access
Technical menu: statistics, alarm, autotest, data
recovery for technicians and maintenance



OTHERS

Grey skinplate outer casing, stainless steel look
Transmission by direct drive
SOFT DRY - new drum with stamped holes
COOL DOWN - anti-wrinkle at the end of the cycle
Electric or gas heating
CE approved



OPTIONS

- CARE DRY - Intelligent humidity control
- Double doorglass
- Tropicalized model
- SPRINKLER - Integrated Fire Extinguishing System
- Printer
- Danube Online IoT communication
- Rear panel with external air inlet + filter
- Stainless steel outer casing
- Stainless steel front panel
- New perfumes dosing/vaporizing system
- Fluff filter with grid 0,3 mm (standard is 0,6 mm)
- Reverse door opening




Intertek



Intertek

TECHNICAL DATA	UNIT.	STD-16 SILVER G PLUS
CAPACITY		
Capacity 1/18	Kg	37
Capacity 1/20	Kg	34
Hourly Output*	Kg/h	2 x 39
Evaporation capacity*	l/h	35,30
DRUM		
Ø Drum	mm	750
Ø Door	mm	574
Door center height	mm	547 / 1.522
Load hole bottom height	mm	260 / 1.235
Drum length	mm	746
Drum volume	l	330
POWER		
Drum motor power	kW	0,37 x 2
Fan motor power STD SILVER	kW	0,55 x 2
Electric heating power ALL RANGES	kW	N/A
Total electric power (elec.model) STD SILVER	kW	N/A
Gas heating power ALL RANGES	kW	24 x 2
Total electric power (gas model) STD SILVER	kW	1,94
CONNECTIONS		
		GAS
Tension 230V - I + N + T	Nº x mm2 / A	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"
DIMENSIONS / PACKING DIMENSIONS		
Net width / Gross width	mm	785 / 865
Net Depth / Gross Depth	mm	1.443 / 1.457
Net Height / Gross Height	mm	1.980 / 2.126
Net weight / Gross weight	mm	320 / 349
OTHERS		
Max airflow	m3/h	2 x 750
Ø Fume exhaust	mm	2 x 200
Sound level	dB	64

* It may vary depending on the type of heating, filter cleanliness or extraction type.

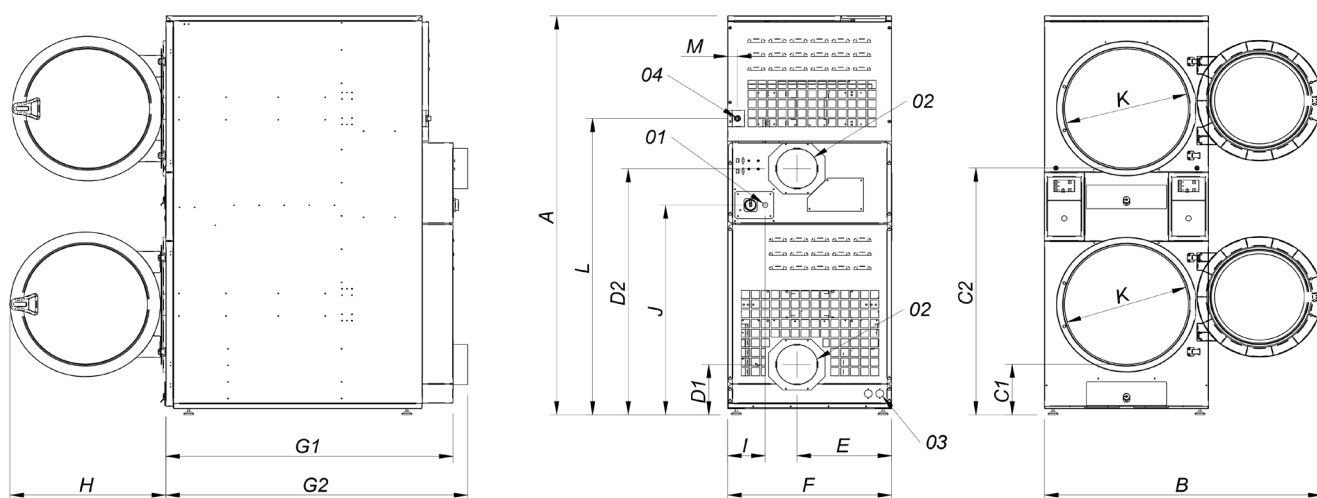

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTLET Ø200
- 03 FIRE EXTINGUISHER WATER VALVE 3/4"
- 04 GAS INLET 1/2"

	A	B	C1	C2	D1	D2	E	F	G1	G2	H	I	J	K	L	M
STD-16 PLUS	1980	1447	259	1234	250	1223	454	785	1374	1443	735	180	1017	575	1472	45