



# HIGH SPIN WASHER EXTRACTORS

WED-60 / 100C / 120C ET2

## EASY TOUCH 2

User friendly and totally programmable 7" ET2  
USB Connection. PC software free of charge for  
programming, traceability, data analysis...  
Videos on display (ads, instructions)  
37 languages  
8 dosing signals as standard

## G FACTOR

High G-Factor 450 (for WED-60) and 350 (for WED-  
100C and 120C)

## EFFICIENCY

Intelligent consumption  
Optimal loading  
Water Recovery tanks ready: AQUABAC  
Low water consumption

## VERSATILITY

Electric < > Hot water  
**WET CLEANING** features as standard

## CONNECTIVITY

Remote technical service  
Management of laundries: OPL  
Remote payment

## ERGONOMICS

Biggest door diameters: Ø 560 mm (WED-60) and Ø  
700 mm (WED-100C and 120C)  
Easy opening/closing system for door lock

## MAINTENANCE

Equivalent parts for all models: contactors,  
electronic devices, gear  
Technical menu: traceability, error diagnosis

## OTHERS

Free standing models  
Grey skinplate outer casing  
Drum and tub in stainless steel AISI 304  
Detergent dispenser with 5 compartments  
Electronic control of imbalance with frequency control  
LOADING AID feature: water and rotation control  
CE and WRAS approved product. Option ETL



## OPTIONS

- Double drain
- Normally closed valve for WED-60
- Tilting options: frontal or double tilt
- Water inlet hose (for WED-60)
- 6 extra dosing signals relay card
- Weighing system: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Printer
- Danube Online IoT communication
- Reversible door opening (for WED-60)
- Tropicalized model: protected board
- Kit to transform an E or HW heated machine into steam version (for WED-60)
- Double heating E + S (for WED-60)
- Panel to cover feet for WED-60
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel




Intertek



Intertek

TECHNICAL DATA	UNIT.	WED-60 ET2	WED-100C ET2	WED-120C ET2	
<b>DRUM</b>					
Load capacity 1:9 / 1:10	Kg	67/60	105/95	128/115	
Volume	l	600	950	1.150	
Diameter	mm	1.048	1.360	1.360	
Depth	mm	684	654	792	
<b>GENERAL DETAILS</b>					
Washing speed / Spinning speed	r.p.m.	38/875	34/678	34/678	
G Factor	-	450	350	350	
Maximum force transmitted	KN	12,95 ±4,2	37,77 ±5,25	37,77 ±5,25	
Frequency-dynamic force	Hz	12,66	11,33	11,33	
Noise level	dB	<70	<70	<70	
Coin laundry version	-	NO	NO	NO	
Double drain	-	OPT	OPT	OPT	
Weighing System / Tilting System	-	OPT/OPT	OPT/OPT	OPT/OPT	
<b>DOOR</b>					
Height door center / door base	mm	1.190/830	1.330/900	1.330/900	
Diameter	mm	560	700	700	
<b>POWER</b>					
Motor	kW	11	15	15	
Electric heating power	kW	36	-	-	
Total electric power (electric model)	kW	40	-	-	
Total electric power (hot water, steam mod.)	kW	11	15	15	
<b>CONNECTIONS</b>		<b>ELECTRIC</b>	<b>STEAM / HOT WATER</b>	<b>STEAM / HOT WATER</b>	<b>STEAM / HOT WATER</b>
Tension 230V - III + T	N° x mm2 / A	3 x 25 / 100A	-	-	-
Tension 400V - III + N + T	N° x mm2 / A	4 x 16 / 63A	4 x 4 / 32A	4 x 6 / 40A	4 x 6 / 40A
Steam inlet (Steam model)	Inch	3/4"	-	1-1/4"	1-1/4"
Maximum steam consumption (Steam model)	Kg/h	18	-	26,5	26,5
Water inlet	Inch	1"	-	1-1/2"	1-1/2"
Water main pressure	Kgs/cm <sup>2</sup>	2-4	-	2-4	2-4
Maximum water consumption*	Lit/h	633	-	1.254	1.254
Compressed air inlet	Inch	-	-	1/4"	1/4"
Compressed air pressure	Bar	-	-	4	4
Drain	Inch	3"	-	4"	4"
Drainage capacity	Lit/min	200	-	500	500
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net Width / Gross Width	mm	1.478/1.540	1.815/1.900	1.815/1.900	
Net Depth / Gross Depth	mm	1.444/1.580	1.690/1.940	1.828/1.940	
Net Height / Gross Height	mm	1.945/1.970	2.245/2.290	2.245/2.290	
Net weight / Gross weight	kg	1.400/1.520	3.900/4.050	3.950/4.100	
Volume	m3	4,79	8,44	8,44	

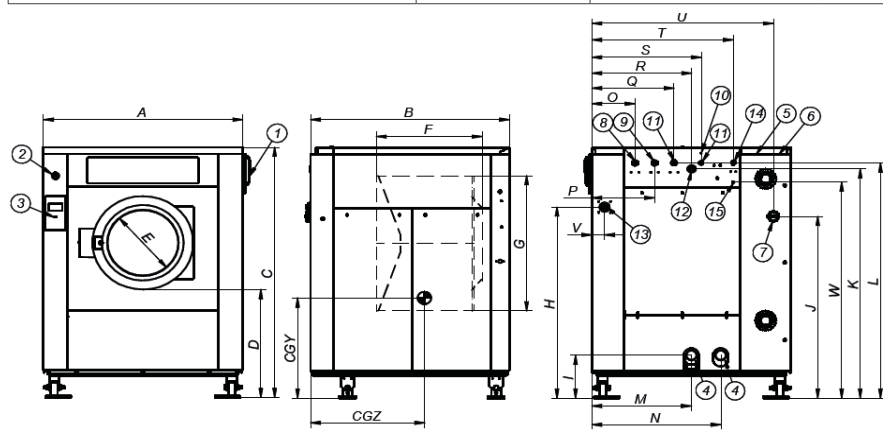

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION
- 15 AIR INTAKE

\* N°2 Program, 100% load

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
WED-60	1.427	1.426	1.945	825	560	760	1.050	1.500	350	1.420	1.780	1.842	714	924	309	449	589	715	784	968	1.300	90	1.692	644	972
WED-100C	1.765	1.650	2.245	945	700	792	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.025
WED-120C	1.765	1.832	2.245	945	700	930	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.130