



MEDIUM SPIN WASHER EXTRACTORS

WEM-11 / 14 / 18 / 27 ET2



EASY TOUCH 2

User friendly and totally programmable 7" ET2
USB Connection. PC software free of charge for
programming, traceability, data analysis...
Videos on display (ads, instructions)
37 languages
8 dosing signals as standard



G FACTOR

High G-Factor 300 for medium spin washers
Reduced residual moisture, reduced drying time



EFFICIENCY

Intelligent consumption
Optimal loading
Water Recovery tanks ready: AQUABAC
Low water consumption



VERSATILITY

Make to order: customisation
OPL < > COIN
Electric < > Hot water
WET CLEANING features as standard



CONNECTIVITY

Remote technical service
Management of laundries: OPL and COIN
Remote payment



ERGONOMICS

Biggest door diameters: Ø 373 mm (WEM-11/14) and
Ø 460 mm (WEM-18/27)
Easy opening/closing system for door lock



MAINTENANCE

Hinged panel: easy access to parts
Equivalent parts for all models: contactors, gear,
electronic devices
Technical menu: traceability, error diagnosis



OTHERS

Hard mounted washers to be anchored to the floor
Grey skinplate outer casing
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency control
LOADING AID feature: water and rotation control
CE and WRAS approved product



OPTIONS

- Double drain for water recovery (WEM-18/27)
- External double drain 3" (recommended for WEM-11/14)
- Normally closed valve
- AQUA FLOW: recirculation of bath water
- 6 extra dosing signals relay card
- Printer
- Danube Online IoT communication
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW or heated machine into steam version
- Stainless steel AISI 304 outer casing
- Stainless steel AISI 304 front panel
- Anchoring base
- Coin/token kit
- Delayed door opening in case of power outage




Intertek



Intertek

TECHNICAL DATA	UNIT.	WEM-11 ET2	WEM-14 ET2	WEM-18 ET2	WEM-27 ET2				
DRUM									
Load capacity 1:9 / 1:10	Kg	11/10	14/13	20/18	28/25				
Volume	l	100	130	180	250				
Diameter	mm	620	620	700	770				
Depth	mm	330	430	470	530				
GENERAL DETAILS									
Washing speed / Spining speed	r.p.m.	50/932	50/929	45/874	40/836				
G Factor	-	300	300	300	300				
Maximum force transmitted	KN	2,08 ±5	2,36 ±6	2,77 ±8	3,96 ±10				
Frequency-dynamic force	Hz	12,66	12,66	12	11,5				
Noise level	dB	<70	<70	<70	<70				
Coin laundry version	-	YES	YES	YES	YES				
Double drain	-	OPT (external)	OPT (external)	OPT	OPT				
Weighing system / Tilting system	-	NO / NO	NO / NO	NO / NO	NO / NO				
DOOR									
Height door center / door base	mm	570/310	570/310	655/348	700/400				
Diameter	mm	373	373	460	460				
POWER									
Motor	kW	1,1	1,1	2,2	3				
Electric heating power	kW	6	9	12	18				
Total electric power (electr. mod)	kW	6,3	9,5	12,75	19				
Total electric power (hw, steam model)	kW	1,1	1,1	2,2	3				
CONNECTIONS		ELECTRIC	STEAM HW	ELECTRIC	STEAM HW	ELECTRIC	STEAM HW	ELECTRIC	STEAM HW
Tension 230V- I + N + T	N° x mm ² / A	2x4 / 32A	2x1,5 / 6A	2x10 / 50A	2x1,5 / 6A	2x16 / 63A	2x1,5 / 10A	-	2x1,5 / 16A
Tension 230V- III + T		3x2,5 / 20A	-	3x4 / 32A	-	3x6 / 40A	-	3x16 / 63A	-
Tension 400V- III + N + T		4x1,5 / 16A	-	3x1,5 / 16A	-	4x2,5 / 20A	-	4x4 / 32A	-
Steam inlet (Steam model)	Inch	1/2"		1/2"		1/2"		3/4"	
Maximum steam consumption (Steam model)	Kg/h	7		8,5		12		15	
Water inlet	Inch	3/4"		3/4"		3/4"		3/4"	
Water main pressure	Kgs/cm ²	2-4		2-4		2-4		2-4	
Maximum water consump.*	Lit/h	59,8		79,4		118,7		176,1	
Drain	Inch	3"		3"		3"		3"	
Drainage capacity	Lit/min	200		200		200		200	
DIMENSIONS / PACKING DIMENSIONS									
Net Width / Gross Width	mm	719/800		719/800		788/840		884/930	
Net Depth / Gross Depth	mm	684/990		830/990		840/1.010		1.011/1.150	
Net Height / Gross Height	mm	1.158/1.350		1.158/1.350		1.307/1.500		1.340/1.523	
Net weight / Gross weight	kg	217/225		239/247		281/301		340/370	
Volume	m ³	1,07		1,07		1,3		1,6	

* N°20 Program, 75% load

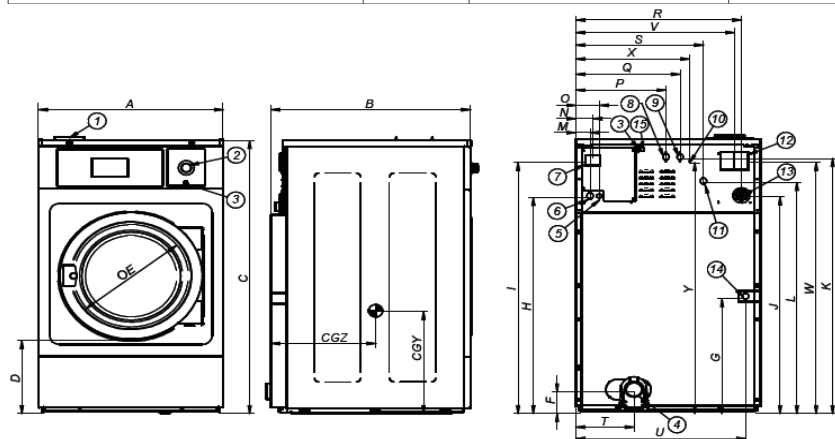

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION
- 15

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
WEM-11	719	697	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	383	511
WEM-14	719	840	1.158	310	373	144	440	886	1.054	889	1.073	958	61	74	101	316	376	637	475	211	654	607	1.053	416	1.053	484	524
WEM-18	788	850	1.307	348	460	108	552	1.035	1.203	1.038	1.222	1.107	61	74	101	385	445	706	544	249	724	676	1.202	485	1.202	479	546
WEM-27	884	1.010	1.330	400	460	145	548	1.063	1.230	1.065	1.250	1.135	61	74	101	430	510	801	640	268	820	772	1.220	570	1.210	543	591