



PROFESSIONAL WASHERS EXTRACTORS

WPR-8 / WPR-10 ET2



VERSATILITY

OPL <> COIN
ELECTRIC <> HOT WATER
DRAIN VALVE <> PUMP
SINGLE <> STACKED
WET CLEANING standard
Suitable for many sectors: restaurants, gyms, campings, laundromats, dry cleaners, nurseries, facility services (mops)...



FEATURES

High G factor 450
User friendly and fully programmable ET2 control with 4,3" touch screen
Display of videos (very useful for self-service)
8 dosing signals as standard
USB connection. Free PC software for programming, traceability, data analysis...
Traceability as standard
WET CLEANING as standard: fully adjustable water levels and washing speeds for delicate laundry
Remote communication ready
Multi-payment system
Short washing cycles (heating power 6 kw)



EFFICIENCY

Water Saving: possibility to choose between 3 levels of savings
Optimal Loading: water levels and detergents adapted to the load
High G factor 450: reduced residual moisture, reduced drying time
Base for mops cleaning as option
Base for water recovery with tank as option



ROBUSTNESS

Skinplate outer casing, robust aluminium door
AISI 304 stainless steel vat, drum and ribs
No inner drum seal: easier to clean
Industrial house bearing and bearings (up to 15000 working hours)
Same gear and inverter as industrial models
Industrial door locking system



OTHERS

Free standing: no anchoring to the floor
2 water inlets
Detergents dispenser with 4 compartments
leveling feet included
Models with drain valve or with drain pump
Imbalances controlled by frequency inverter
CE and WRAS approved



WPR+DPR



NEW OPTION
Soap box on top panel

OPTIONS

- Double drain kit (only models with drain valve)
- Valve-pump transformation kit
- 6 extra dosing signals for dosing pumps
- Door silicone gasket
- Reversing door opening
- Tropicalized model: protected board
- AISI 304 stainless steel outer casing
- Danube Online communication kit
- Soap dispenser on the top
- Plinth for better ergonomics (loading height)
- Plinth for mops, filter included (only model with valve)
- Plinth for water recovery (tank included)
- Coin kits: token/coins meter + box, central pay
- Automatic door unlock device (in case of power failure)
- Ship tension




Intertek



Intertek

TECHNICAL DATA	UNIT.	WPR-8 ET2 V	WPR-8 ET2 P	WPR-10 ET2 V	WPR-10 ET2 P				
DRUM									
Capacity 1:9 / 1:10	Kg	9/8	9/8	11/10	11/10				
Volume	l	80	80	100	100				
Diameter	mm	532	532	532	532				
Depth	mm	360	360	425	425				
GENERAL DATA									
Washing / spinning speed	r.p.m.	50/1.250	50/1.250	45/1.250	40/1.250				
G factor	-	450	450	450	450				
Maximum force transmitted	KN	1,47 ±0,53	1,47 ±0,53	1,57 ±0,53	1,57 ±0,53				
Frequency dynamic force	Hz	18,33	18,33	18,33	18,33				
Sound level	dB	<70	<70	<70	<70				
Self service version	-	YES	YES	YES	YES				
Double drain	-	YES	NO	YES	NO				
Weighing system	-	NO	NO	NO	NO				
DOOR									
Center door height / base door height	mm	537/280	537/280	537/280	537/280				
Diameter	mm	373	373	373	373				
POWER									
Motor	kW	0,75	0,75	0,75	0,75				
Electric heating power	kW	6	6	6	6				
Total electric power (electric model)	kW	6,25	6,25	6,25	6,25				
Total electric power (hot water model)	kW	0,75	0,75	0,75	0,75				
CONNECTIONS		ELECT.	HOT W.	ELECT.	HOT W.	ELECT.	HOT W.	ELECT.	HOT W.
Tension 230V- I + N + T	N° x mm2 / A	2x4 /32A	2x1,5 /16A	2x4 /32A	2x1,5 /16A	2x4 - 32A	2x1,5 /16A	2x4 /32A	2x1,5 /16A
Tension 230V- III + T		3x2,5 /20A	-	3x2,5 /20A	-	3x2,5 /20A	-	3x2,5 /20A	-
Tension 400V- III + N + T		4x1,5 /16A	-	4x1,5 /16A	-	4x1,5 /16A	-	4x1,5 /16A	-
Tension 110V I + N + T			2x1,5 /10A	-	2x1,5 /10A	-	2x1,5 /10A	-	2x1,5 /10A
Tension 400V III + T		4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A	4x1,5 /16A
Water inlet	BSP	3/4"		3/4"		3/4"		3/4"	
Drain	BSP	2"		1" (pompe)		2"		1" (pompe)	
DIMENSIONS / PACKING DIMENSIONS									
Net width / Gross width	mm	680 / 710		680 / 710		680 / 710		680 / 710	
Net depth / Gross width	mm	698 / 832		698 / 832		742 / 832		742 / 832	
Net height / Gross height	mm	1.040 / 1.130		1.040 / 1.130		1.040 / 1.130		1.040 / 1.130	
Net weight / Gross weight	kg	140 / 150		140 / 150		150 / 160		150 / 160	
Volume	m3	0,67		0,67		0,67		0,67	

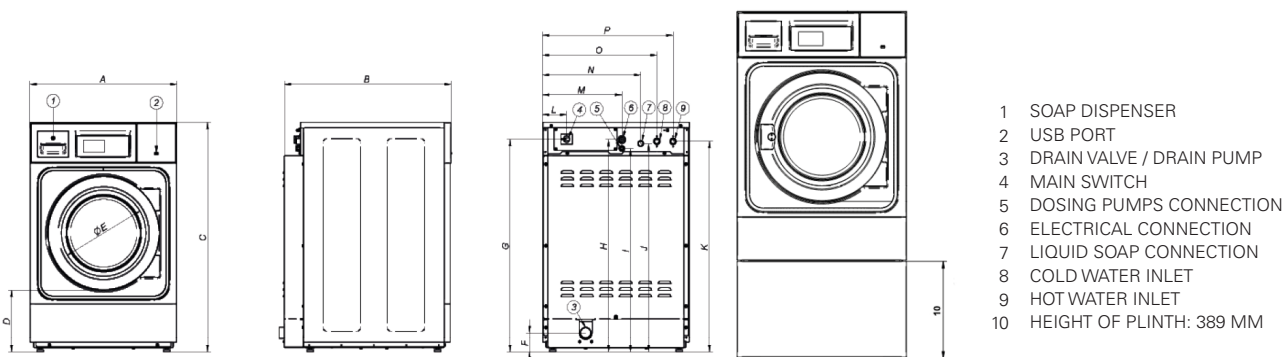

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
WPR-8 V	680	698	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
WPR-8 P	680	698	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
WPR10 V	680	742	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199
WPR-10 P	680	742	1040	278	373	86	964	962	922	942	954	110	366	427	524	603	199