

# DBW-70 ET2 BARRIER WASHER EXTRACTORS



## EASY TOUCH 2

7" touch screen easy to use and fully programmable ET2,  
Double display  
Connection USB. Free software online for programming,  
telemetry, data analysis...  
Videos on display (instructions...)  
37 languages  
8 dosing signals as standard



## OUTSTANDING FEATURES

Automatic positioning of drum with motor brake  
3 water inlets  
WET CLEANING, telemetry as standard  
Dual heating (electric - steam) model available  
G FACTOR 375



## EFFICIENCY

Optimized consumption, automatic or manual adjustment  
of water levels and detergents according to the load  
Ready for water recovery tanks: AQUABAC  
High G factor : reduced residual moisture, reduced drying  
time  
Water saving: 3 configurable levels of savings



## CONNECTIVITY

**IoT - Danube Online standard**  
Remote technical service  
Laundry management



## ERGONOMICS

Huge loading and unloading doors opening  
Easy drum opening by push button  
Loading height (800 mm from door base)



## MAINTENANCE

Electric elements on left side, mechanical ones on right  
side, connections on the top (protected from detergents  
and water splashes)  
Central drain as standard  
Technical menu : statistics, alarms, autotest, data recovery  
for technicians and maintenance



## OTHERS

2 opposed doors  
Grey skinplate outer casing.  
Stainless steel AISI 304 top panel, vat and drum  
Electronic control of imbalance with frequency inverter  
Electric, steam or dual heating  
CE approved




## OPTIONS

- Automatic weighing system on feet
- 6 extra dosing signals
- Printer
- Double drain
- Titration valve
- Side drain valve
- Low steam pressure
- 4 compartments detergent box kit
- UPS protection kit in case of power failure
- End of cycle light alarm
- 1-door opening (single side operation)
- Stainless steel AISI 304 outer casing
- Plinth for loading height at 850 mm (door base)
- Stainless steel sanitary frame
- Other tensions

TECHNICAL DATA	UNIT.	DBW-70 ET2	
<b>DRUM</b>			
Capacity 1:9 / 1:10	Kg	78 / 70	
Volume	l	694	
Diameter	mm	800	
Depth	mm	1.380	
No of drum compartment	No	2	
Pullman partition of drum		N/A	
<b>GENERAL DETAILS</b>			
Washing / spin speed	r.p.m.	45 / 920	
G Factor	-	375	
Dynamic force	KN	5,24	
Dynamic force frequency	Hz	15,4	
Sound level	dB	<70	
Double drain	-	OPT	
Weighing system	-	OPT	
<b>DRUM</b>			
Height door bottom	mm	800	
Drum opening dimensions	mm	640 x 515 (x2)	
Vat opening dimensions	mm	1.402 x 650 (x2)	
<b>POWER</b>			
Motor	kW	7,5	
Electric heating	kW	45	
Total electric power (elec mod)	kW	52,5	
Total electric power (steam mod)	kW	7,5	
<b>CONNECTIONS</b>			
		<b>ELECTRIC DUAL</b>	<b>STEAM</b>
Tension 230V - I + N + T	N° x mm2 / A	-	-
Tension 230V - III + T	N° x mm2 / A	4 x 35 / 160A	4 x 2,5 / 16A
Tension 400V - III + N + T	N° x mm2 / A	5 x 16 / 80A	5 x 2,5 / 10A
steam inlet (steam mod)	Inch	3/4"	
Max. steam consumption (steam models)	Kg/h	34,2	
Water inlet	Inch	1"	
Water pressure	Kgs/cm <sup>2</sup>	3-5	
Max. water consumption*	Lit/h	720	
Drain	Inch	3"	
Drain flow	Lit/min	160	
<b>OVERALL DIMENSIONS / PACKING DIMENSIONS</b>			
Net width / Gross width	mm	2.124 / 2.310	
Net depth / Gross depth	mm	1.195 / 1.300	
Net height / Gross height	mm	1.615 / 1.720	
Net weight / Gross weight	kg	1.190 / 1.220	
Volume	m3	4,10 / 5,17	

\* N°2 Program, 100% load

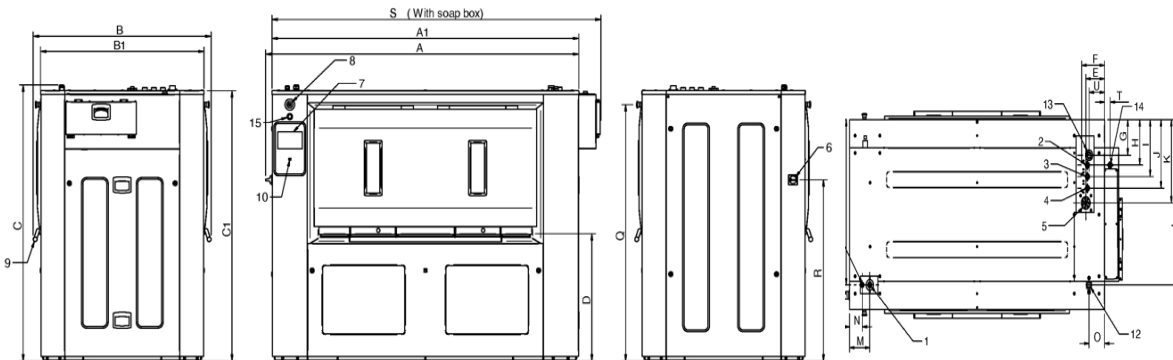

01. Electrical connexion
02. Cold water inlet
03. Soft water inlet
04. Hot water inlet
05. Liquid products inlet
06. Main switch
07. Control panel
08. Emergency stop
09. Door opening
10. USB port
11. Dosing pumps connexion
12. Steam inlet
13. Exhaust
14. Cold water for detergents box
15. Manual rotation
16. Ethernet port

	A	B	C	A1	B1	C1	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
DBW-70	2104	1196	1612	2061	1098	1581	745	152	138	206	263	330	397	482	956	163	103	126	956	1499	1059	2210	45	125

