



## R2D18/100 - R2D18/120 WALL IRONERS Ø 180 mm



### ELECTRONIC PROGRAMMER

Simple and user friendly : Start/stop button, selection of 4 temperatures  
Preset ironing speeds, not adjustable



### FEATURES

Large roll contact area with the linen  
Roll lifting control by pedal  
Two available models:  
Standard: roll with cotton polyester coating  
Nomex: roll with Nomex coating



### ROBUSTNESS

Nomex quality coating: resistant to high temperatures  
Panels in grey skinplate and stainless steel  
Wooden feeding board



### EFFICIENCY

Acoustic comfort : <55 dB  
Minimum space requirement: space saving, suitable for small spaces  
Ideal for processing small quantity of flat linen in facilities like restaurants, guest rooms, hostels...




### MAINTENANCE

Easy installation : requires only an electrical connection  
Easy access on both sides for maintenance




### OTHERS

Front feeding and return  
Roll Ø 180 mm  
Working widths: 1.000 and 1.200 mm  
Electric heating  
CE certification

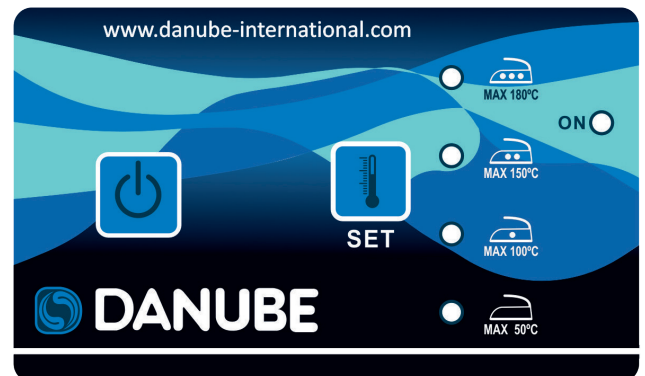

| TECHNICAL DATA                                | UNIT.                   | R2D18/100       | R2D18/120       |
|---|-------------------------|-----------------|-----------------|
| <b>GENERAL DATA</b>                           |                         |                 |                 |
| Theoretical production*                       | Kg/h                    | 15              | 20              |
| Ø Roll  | mm                      | 180             | 180             |
| Working width                                 | mm                      | 1.000           | 1.200           |
| Ironing speed                                 | mt/min                  | 2,02            | 2,02            |
| Electronic programmer                         | -                       | Yes             | Yes             |
| Bed lifting                                   | -                       | By pedal        | By pedal        |
| <b>POWER</b>                                  |                         |                 |                 |
| Heating power                                 | Kw                      | 3,3             | 4               |
| Roll motor power                              | Kw                      | 0,029           | 0,029           |
| Total electric power                          | Kw                      | 3,329           | 4,029           |
| <b>CONNECTIONS</b>                            |                         | <b>ELECTRIC</b> | <b>ELECTRIC</b> |
| Tension 230V - I + N + T                      | N° x mm <sup>2</sup> /A | 3 x 4 / 16A     | 3 x 4 / 20A     |
| Tension 400V - III + N + T                    | N° x mm <sup>2</sup> /A | -               | -               |
| <b>OVERALL DIMENSIONS/ PACKING DIMENSIONS</b> |                         |                 |                 |
| Net width / Gross width                       | mm                      | 1.370 / 1.490   | 1.570 / 1.690   |
| Net depth / Gross depth                       | mm                      | 438 / 540       | 438 / 540       |
| Net height / Gross height                     | mm                      | 952 / 1.130     | 952 / 1.130     |
| Net weight / Gross weight                     | Kg                      | 80 / 100        | 90 / 110        |
| Volume  | m <sup>3</sup>          | 0,57 / 0,91     | 0,65 / 1,03     |
| <b>OTHERS</b>                                 |                         |                 |                 |
| Noise Level                                   | dB                      | 55              | 55              |

\*20-25% Theoretical production

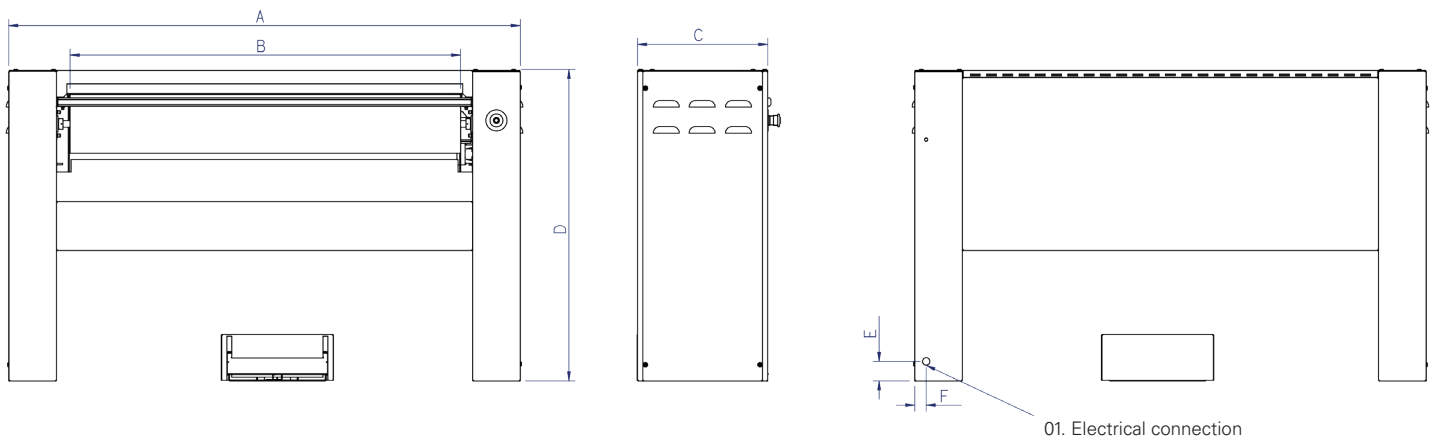

|           | A    | B    | C   | D   | E  | F  |
|-----------|------|------|-----|-----|----|----|
| R2D18/100 | 1370 | 1000 | 400 | 955 | 60 | 35 |
| R2D18/120 | 1670 | 1200 | 400 | 955 | 60 | 35 |

