

WED-100C/120C ET2 HIGH SPIN WASHER EXTRACTORS



EASY TOUCH 2

7" touch screen, user-friendly and fully programmable
Connection USB. Free software online for programming,
telemetry, data analysis...
Videos display (ads, instructions...)
37 available languages
8 dosing signals as standard.



G FACTOR

High G factor 350: reduced residual moisture, reduced
drying time, energy savings



EFFICIENCY

Optimized consumption: automatic or manual adjustment
of water levels and detergents according to the load
Water Saving system: 3 configurable levels of savings
Ready for water recovery tanks AQUABAC



VERSATILITY

MAKE TO ORDER: possibility to customize
WET CLEANING as standard



CONNECTIVITY

Communication Danube Online - IoT as standard
Remote technical service
Management of laundry



ERGONOMICS

Big aluminium door ø 700 mm
Easy door lock system



MAINTENANCE

Same parts on all the models: inverter, electronic
components, gear...
Technical menu: statistics, errors...



OTHERS

Free standing: no anchoring to the floor
Steam or hot water heating
Stainless steel vat and drum, skinplate outer casing
3 water inlets
5 compartments detergents box
Imbalance controlled by frequency inverter
CE and WRAS certificates. ETL option.




OPTIONS

- 2 dosing pumps kit DQ-2
- Additional dosing pump DB-1
- Double drain
- Double or front tilting kit
- Automatic weighing system on feet (not available with tilting kit)
- 6 additional dosing signals
- Reversing door opening
- Tropicalized model (ET2)
- Electric - steam dual heating kit
- AISI-304 stainless steel outer casing
- Other tensions

TECHNICAL DATA	UNIT.	WED-100C		WED-120C	
DRUM					
Capacity 1:9 / 1:10	kg	105 / 95		130 / 115	
Volume	l	950		1.150	
Diameter	mm	1.360		1.360	
Depth	mm	637		775	
GENERAL DATA					
Washing / extraction speed	r.p.m.	34 / 678		34 / 678	
G factor	-	350		350	
Maximum force transmitted	KN	37,77 ±5,25		37,77 ±5,25	
Frequency dynamic force	Hz	11,33		11,33	
Sound level	dB	<70		<70	
Self-service version	-	NO		NO	
Double drain	-	OPT		OPT	
Weighing / Tilting system	-	OPT / OPT		OPT / OPT	
Sluice option	-	NO		NO	
DOOR					
Height center / base door	mm	1.330 / 900		1.330 / 900	
Diameter	mm	700		700	
POWER					
Motor	kW	15		15	
Heating (Elec. models)	kW	-		-	
Max. elec. power (Elec. models)	kW	-		-	
Max. elec. power (steam or hot w.)	kW	15		15	
CONNECTIONS					
		ELECTRIC		STEAM / HOT W.	
Tension 230V - I + N + T	Nº x mm2 / A	-	-	-	-
Tension 230V - III + T	Nº x mm2 / A	-	3 x 25 / 63A	-	3 x 25 / 63A
Tension 400V - III + N + T	Nº x mm2 / A	-	4 x 10 / 40A	-	4 x 10 / 40A
Steam inlet (steam mod.)	Inch	1-1/4"		1-1/4"	
Max. steam consumption	Kg/h	26,5		26,5	
Water inlet	Inch	1-1/2"		1-1/2"	
Water pressure	Kgs/cm ²	2-4		2-4	
Maximum water consumption*	Lit/h	1.058		1.254	
Drain	Inch	4"		4"	
Drain flow	Lit/min	500		500	
DIMENSIONS / PACKING DIMENSIONS					
Net / gross length	mm	1.836 / 1.900		1.836 / 1.900	
Net / gross depth	mm	1.649 / 2.030		1.863 / 2.030	
Net / gross height	mm	2.245 / 2.290		2.245 / 2.290	
Net / gross weight	kg	3.950 / 4.100		3.950 / 4.100	
Volume	m3	8.83		8.83	

* N°2 Program, 100% load

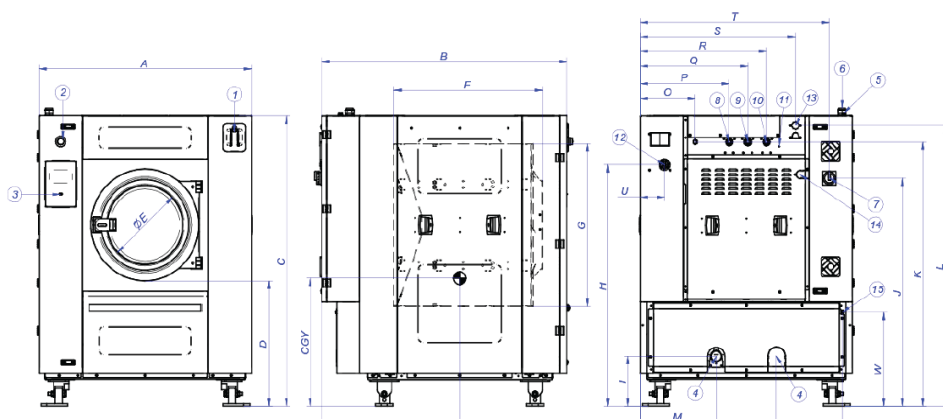

1. SOAP DISPENSER
2. EMERGENCY STOP
3. USB PORT
4. DRAIN 2
5. DRAIN 1
6. ELECTRICAL CONNECTION TO LIQUID SOAP PUMPS
7. ELECTRICAL CONNECTION
8. MAIN SWITCH
9. AUXILIAR WATER INLET
10. HOT WATER INLET
11. EQUIPOTENTIAL CONNECTION
12. COLD WATER INLET
13. STEAM OUTPUT
14. LIQUID SOAP CONNECTION
15. STEAM CONNECTION
16. AIR INTAKE
17. ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	CGY	CGZ
WED-100C	1.765	1.650	2.245	945	700	792	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.025
WED-120C	1.765	1.832	2.245	945	700	930	1.350	1.740	336	1.781	2.038	2.110	675	1.092	494	634	774	954	994	1.239	1.646	165	2.049	853	1.130

